

KOLD-DRAFT®

Project Name:

Location:

Item:

Qty:

Model:

KMXCR-49FD / KMXCF-49FD

REACH-IN REFRIGERATION



KMXCR-49FD / KMXCF-49FD

FEATURES

KOLDRAFT Reach-In Refrigeration is designed for the ultimate in value. Temperature is digitally controlled and easily viewed from the exterior of the cabinet. Stainless steel exterior construction ensures years of long life and maximum durability. KOLDRAFT Reach-In Refrigeration provides unsurpassed quality at a value price.

- Stainless steel exterior and painted aluminum interior ensures years of long life and maximum durability
- CFC-free polyurethane foam insulation
- (3) heavy-duty, adjustable, PE coated wire shelves per section
- Door locks and swivel casters come standard

- Utilizes environmentally friendly CFC-free refrigerant, Refrigerator R134A / Freezer - R404A
- Automatic defrost system
- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior
- Holding temperature: Refrigerator: 33°F to 41°F, Freezer: -10°F to 10°F
- Large evaporator and condenser for quick cooling and greater efficiency
- Automatic interior lighting
- Self contained system
- Recessed handles
- Available in 220V/60Hz/1

Safety


Environmental/Sanitation



Specifications subject to change without notice.

Approvals: UL, UL Sanitation Approved

DIMENSIONS

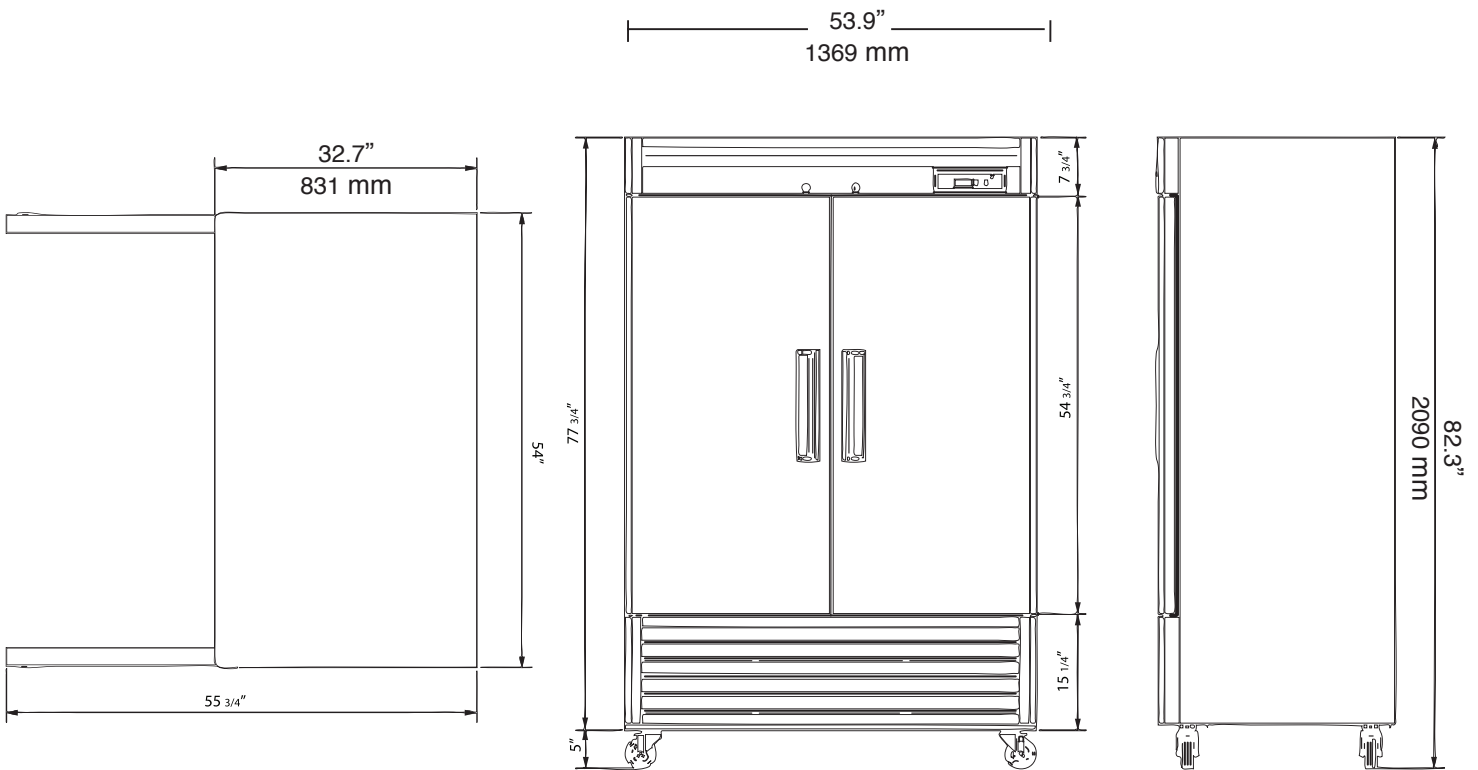

Model	Dim (W"xD"xH")	Capacity	Temp	Amps	Doors	Weight	Shelves
KMXCR-49FD Refrigerator	53.9 x 32.7 x 82.3 1369 x 831 x 2090 mm	49 Cu Ft 1,387 L	33° to 41°F .5° to 5°C	9	2	457 lb 207 kg	6
KMXCF-49FD Freezer	53.9 x 32.7 x 82.3 1369 x 831 x 2090 mm	49 Cu Ft 1,387 L	-10° to 10° F -23° to -12° C	5	2	468 lb 212 kg	6