



The Legacy Companies  
3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
Sales: (954) 202-7419 • Sales@TheLegacyCompanies.com  
Tech Service: (877) 368-2797 • Service@MaxxHelp.com

Project Name: \_\_\_\_\_  
Location: \_\_\_\_\_  
Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
Model: \_\_\_\_\_

www.MaxximumFoodService.com

## GLASS DOOR BEVERAGE CENTERS

### INDOOR/OUTDOOR REFRIGERATION

Model: ☐ MCBC3U

☐ MCBC3U-O

International Model: Add -50 (220V/50Hz/1Ph)  
or -60 (220V/60Hz/1Ph)



MCBC3U



MCBC3U-O

Maxx Ice Indoor/Outdoor refrigeration is designed to fulfill your entertainment area needs. Perfect for any entertainment space, these units can be freestanding or built in and are designed to weather the elements when necessary while providing years of enjoyment with easy maintenance.

#### FEATURES

- Multi-pane glass door enhances energy efficiency by preventing heat loss and minimizing condensation
- Interior long lasting and energy efficient LED lighting
  - Ability to toggle between white & blue light
- 4 metallic wire shelves
- Comes with a 6' NEMA 5-15P cord set making the unit plug & play
- Approved for residential & commercial applications

#### TEMPERATURE

- Holding temperature: 35° to 40°F (1° to 5°C)
- Digitally controlled system maintains optimum temperature
- This unit is designed to store pre-chilled product at the ideal serving temperature – it is not intended to perform as a pull down refrigerator
- Digital temperature display visible from up to 10 feet away

#### CONSTRUCTION

- Exterior Material:
  - MCBC3U: Black painted steel
  - MCBC3U-O: Brushed stainless steel is durable, easy to polish and clean and withstands a harsh outdoor environment (avoiding direct sunlight & heavy rain is suggested)
- Stainless steel door with easy to grip handle running the length of the door
- Interior Material: ABS, an easy to clean, low maintenance surface
- Adjustable legs
- Polyurethane foam insulation to provide better thermal regulation and energy efficiency
- Comes with integrated condensate evaporator so no drain line connection is needed

#### REFRIGERANT


Environmentally friendly, CFC & HCFC free R-134A

#### ELECTRIC

120V/60Hz/1 Ph (NEMA 5-15P)

(220V/50 or 60Hz/1ph available as an option)

Circuit must be grounded & protected to 15 or 20 amps



NEMA 5-15P



Certified to  
ANSI-NSF 7



Certified to  
ANSI UL 471



For European  
Market



DOE 2017  
Compliant

#### Maxx Ice WARRANTY (USA / CANADA)

One (1) year parts

One (1) year on-site labor

Five (5) years compressor (part only)

Administered by The Legacy Companies, 877.368.2797

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

6/6/17 V2 D



The Legacy Companies  
3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
Sales: (954) 202-7419 • Sales@TheLegacyCompanies.com  
Tech Service: (877) 368-2797 • Service@MaxxHelp.com


Project Name: \_\_\_\_\_  
Location: \_\_\_\_\_  
Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
Model: \_\_\_\_\_

[www.MaxximumFoodService.com](http://www.MaxximumFoodService.com)

# GLASS DOOR BEVERAGE CENTERS

## INDOOR/OUTDOOR REFRIGERATION

### MCBC3U & MCBC3U-O

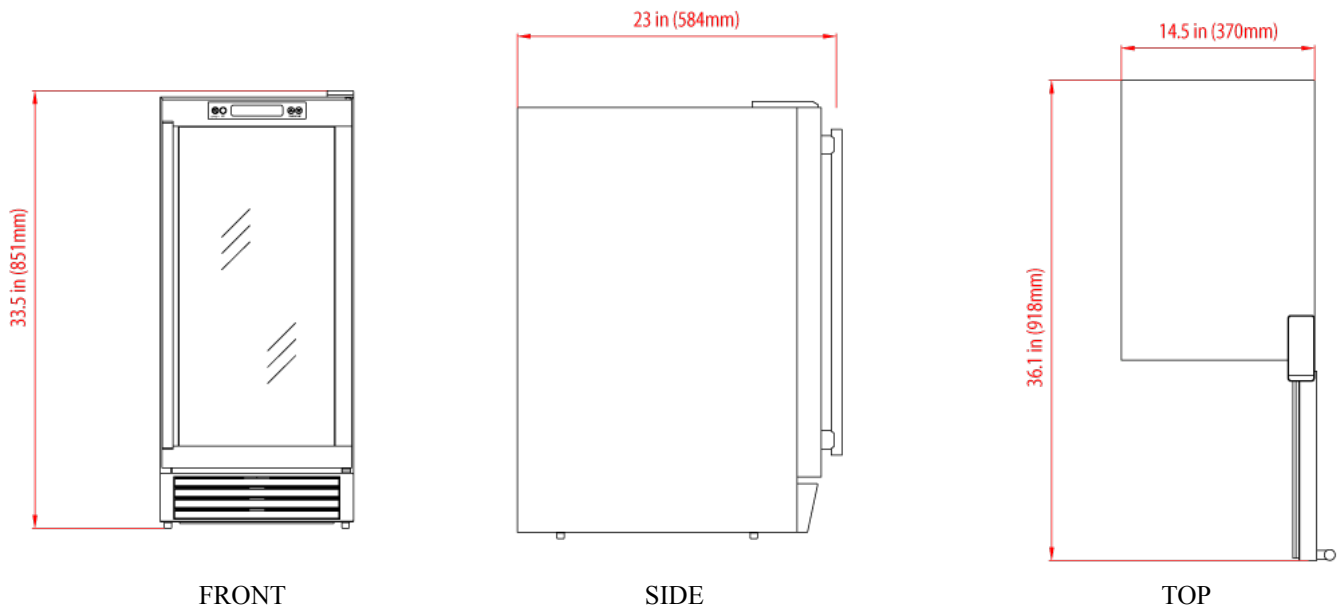

Model	W x D x H (in) (mm)	Temperature Range	Watts	Amp Draw	Doors	Weight	Shelves
MCBC3U	14.5 x 23 x 33.5in 368 x 584 x 851mm	35° to 40° F 1° to 5° C	400	4	1	77 lb 35 kg	4
MCBC3U-O	14.5 x 23 x 33.5in 368 x 584 x 851mm	35° to 40° F 1° to 5° C	460	4	1	67 lb 30 kg	4

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.  
While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.  
By using the information provided, the user assumes all risks in connection with such use.