

| Project Name: |      |
|---------------|------|
| Location:     |      |
| Item:         | Qty: |
| Model:        |      |

#### MCBD60-2B

### **BACK BAR COOLERS**



FEATURES MCBD60-2B

Maxx Cold's keg coolers with direct draw beer towers feature a sanitary stainless steel top and black coated steel exterior for durability and easy cleaning. Forced air cooling distributes air evenly to keep contents of the cabinet cooled at the optimum temperature. Standard 3-inch polished stainless steel draft tower dispensers are attached to the top center of the stainless steel counter and cooled by continuous cold air circulation through the channel air distributor system. This reduces foam when dispensing beer. Easy-to-access refrigerated storage area for glasses and mugs. Refrigeration temperature ranges from 32°F to 40°F (0°C to 4°C).

- · Painted black coated steel exterior.
- Galvanized steel interior.
- Stainless steel interior floor.
- · Stainless steel top.
- · 3-inch polished stainless steel draft tower dispenser.
- · Slide out condensing unit for easy cleaning and servicing.
- Epoxy coated evaporator coils resist corrosion.
- Standard 4" casters.
- · 2 door has 4 shelves
- Available in 115V/60HZ, 220V-230V/60HZ



Specifications subject to change without notice.


Approvals: ETL, ETL Sanitation approved



## MCBD60-2B

# BACK BAR COOLERS

#### **DIMENSIONS**

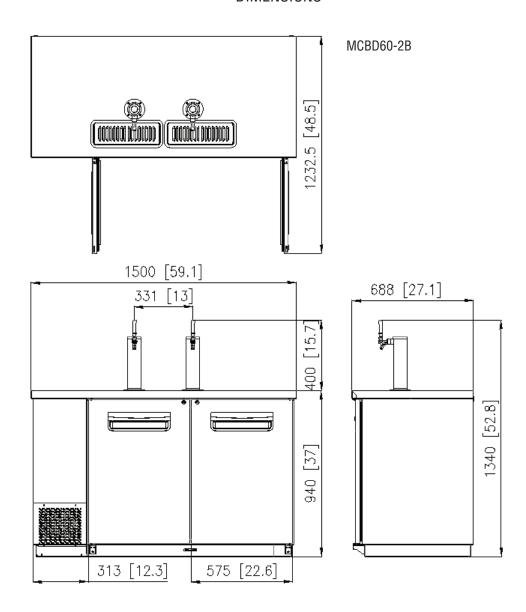

| MODEL     | FINISH                              | DOORS   | CAPACITY          | DIMENSIONS<br>(W"xH"xD")              | TEMP                        | НР  | AMPS         | VOLTAGE/HZ               | WATTS            | NET<br>WEIGHT    |
|-----------|-------------------------------------|---------|-------------------|---------------------------------------|-----------------------------|-----|--------------|--------------------------|------------------|------------------|
| MCBD60-2B | Painted<br>Black<br>Coated<br>Steel | 2 Solid | 19 Cu Ft<br>538 L | 59.1 x 27.1 x 52.8<br>1501x688x1341mm | 32° to<br>40°F<br>0° to 4°C | 3/8 | 6.3A<br>3.1A | 115/60HZ<br>220~230/60HZ | 724.5<br>682~713 | 276 lb<br>125 kg |