

Project Name:	
Location:	
Item:	Qty:
Model:	

MCR-23GD / MCR-49GD

GLASS DOOR REACH-IN REFRIGERATION



MCR-23GD



MCR-49GD

FEATURES

Maxx Cold Glass Door Reach-In Refrigeration pairs durability and longevity with visual appeal. Featuring a bottom mounted compressor, the glass door refrigerators effectively keep product at exactly the right temperature while utilizing energy efficiency. The simple to use but precise digital controls allow for accurate and flexible use of the unit. For energy savings, durability, and visually appealing construction, Maxx Cold glass door refrigeration is sure to impress.

- Stainless steel exterior and interior ensures years of long life and maximum durability
- CFC-free polyurethane foam insulation
- (3) heavy-duty, adjustable, PE coated wire shelves per section
- Door locks and 4" diameter swivel casters come standard
- Utilizes environmentally friendly CFC-free R134A refrigerant
- Bottom mount compressor provides energy savings and ease of service
- Automatic defrost system
- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior
- Holding temperature: 28°F to 39°F
- Open door alert, beeps when door has been open for 5 minutes
- Large evaporator and condenser
- Automatic interior lighting
- Self contained system
- Available in 120V/60Hz, 220V/50Hz and 208-230V/60Hz




Specifications subject to change without notice.

Approvals: ETL, ETL Sanitation approved

MCR-23GD / MCR-49GD

GLASS DOOR REACH-IN REFRIGERATION

DIMENSIONS

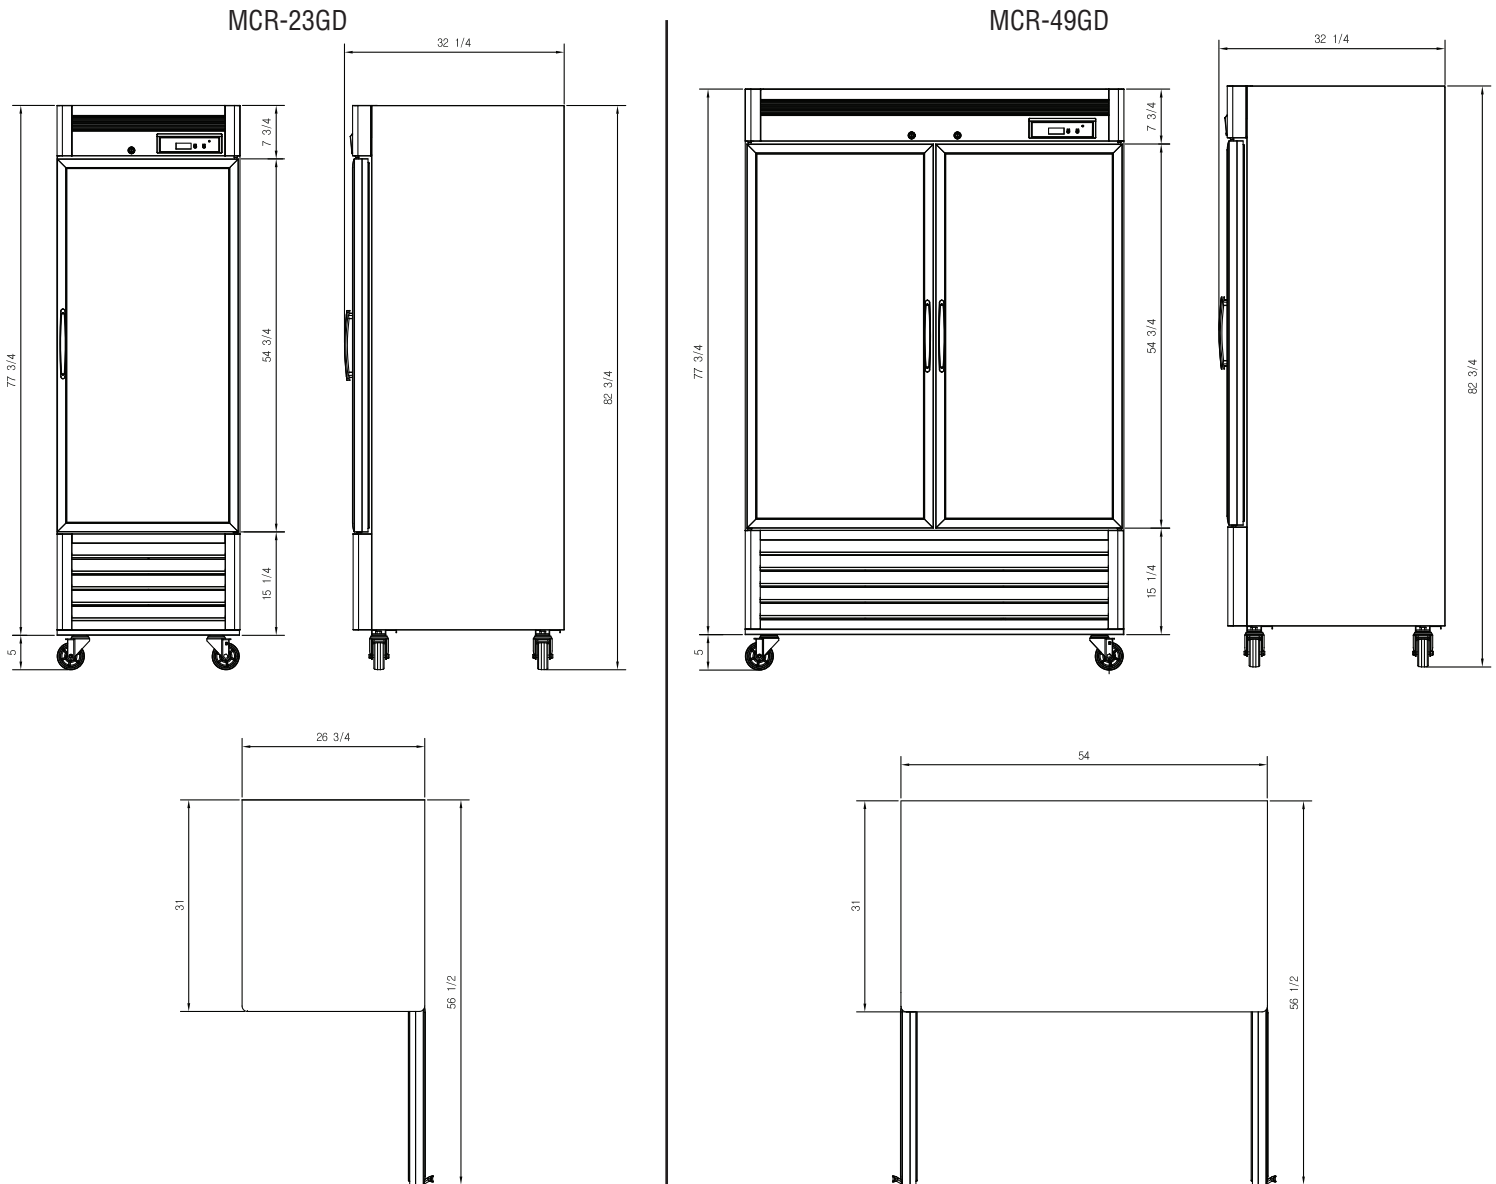

Model	Dim (W"xD"xH")	Capacity	Temp	Watts	Doors	Weight	Shelves
MCR-23GD	26.75 x 31 x 82.75 679.5x787.4x2102mm	23 Cu Ft 651 L	28° to 39°F -2° to 4°C	748	1	310 lb 141 kg	3
MCR-49GD	54 x 31 x 82.75 1372x787.4x2102mm	49 Cu Ft 1,387 L	28° to 39°F -2° to 4°C	1288	2	465 lb 211 kg	6