

Maxx Cold X-series | The Legacy Companies 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401 www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

Project Name: _		
Location:		_
Item #:	Qty:	
Model:		

## COUNTERTOP MERCHANDISERS 4-SIDED GLASS | REFRIGERATORS

Model:

MECR-31D 1 Door

MECR-32D 2 Door Pass Through

International Model: Add -50 (220V/50Hz/1Ph)





MECR-31D 1 Door

MECR-32D 2 Door Pass Through

### REFRIGERANT

• Environmentally-friendly R-290 propane which occurs naturally with a GWP value of 3

ANSI UL 471

#### **ELECTRIC**

Intertek

Certified to

ANSI-NSF 7

110/60Hz/1 Ph (NEMA 5-15) Cord set includes plug & 6' (3m) cord



**NEMA 5-15P** 



**DOE 2017** Compliant

4-Sided countertop clear glass door merchandisers are designed for durability and visual appeal in promoting impulse sales of your product. These glass door merchandisers are energy efficient and effective at keeping product at exactly the right temperature. This keeps food fresh & delicious for longer time periods. The simple-touse but precise digital controls allows for accurate temperature settings and regulation. Unit comes with an internal condensate evaporator so a floor drain connection is not necessary.

### **FEATURES**

- Dual pane tempered glass doors and sides enhance energy efficiency by preventing heat loss and minimizing condensation
- Interior LED lighting
- Internal hidden bottom mounted compressor with flow through ventilation to cool the utility compartment
- Manual defrost cycle maintains ideal storage conditions if frost build-up ever becomes an issue
- Internal condensate evaporate pan included. No drain connection is needed.
- Comes with all needed approvals for commercial retailors.
- Single or pass through twin door models available to suit your specific site layout requirements
- Flat top accommodates POP or other marketing support concepts
- 3 heavy-duty, adjustable chrome-plated wire shelves are provided Use of R-290 as the system refrigerant delivers energy savings and presents no environmental risks as it's Global Warming Potential value of 3 is unsurpassed by any other current commercial alternatives
- Appliance size and height is adjustable for placing the unit on the floor or counter top
- Unit conforms to 2017 DOE requirements

#### **TEMPERATURE**

- Holding temperature: 34° to 54°F (1° to 12°C)
- Digitally controlled system maintains optimum temperature
- This unit is designed to store pre-chilled product at the ideal serving temperature – it is not intended to perform as a pull down refrigerator
- Digital control scheme enables easy adjustment and delivers precise internal compartment temperature regulation Temperature can be displayed in Celsius or Fahrenheit

#### CONSTRUCTION

- Exterior Material: Durable, corrosion resistant black painted steel, black plastic trim, stainless steel base panels Interior Material: ABS, an easy to clean, low maintenance surface
- Energy efficient R-290 condensing unit for excellent temperature regulation
- 2" legs (two front adjustable leveling legs)

## Maxx Cold X-Series WARRANTY (USA / CANADA)

One (1) year parts

One (1) year on-site labor

Four additional (4) years compressor (part only) Administered by The Legacy Companies, 877.368.2797


24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



Ideal for storing beverages, covered pastries, packaged refrigerated food, store prepared packaged food like sliced cheese and cold cuts, salads, yogurt cups and take home meals.

# **COUNTERTOP MERCHANDISERS 4-SIDED GLASS | REFRIGERATORS**

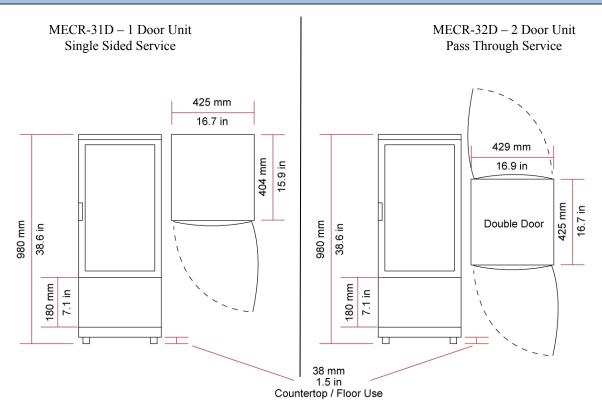

Optional 6" leveling legs set is available for floor mounted applications

	MECR-31D	MECR-32D
In: External Dimensions W x D X H	16.7 x 15.9 x 38.6	16.9 x 16.7 x 38.6
mm: External Dimensions W x D X H	425 x 404 x 980	429 x 425 x 980
Nominal Capacity	3 Cu Ft / 85 L	3 Cu Ft / 85 L
Actual Storage Capacity	2.89 Cu Ft / 82 L	3.03 Cu Ft / 86 L
Doors	1	2
Shelves	(3) shelves	(3) shelves
Unit Weight	79.4 lb / 36 kg	80.5 lb / 36.5 kg
Shipping Weight	84.9 lb / 38.5 kg	86 lb / 39 kg
Shipping Dimensions (mm)	480 x 450 x 1035	480 x 480 x 1035
Watt Rating	180 W	164 W
Refrigerant	R-290	R-290
Refrigerant Charge Size	1.41 ounces (40g)	1.41 ounces (40g)

Recommended minimal side clearance for each door is 18". For closed sides, recommended clearance is 3".

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.

While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.