



The Legacy Companies  
3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
Sales: (954) 202-7419 • Sales@TheLegacyCompanies.com  
Tech Service: (877) 368-2797 • Service@MaxxHelp.com

Project Name: \_\_\_\_\_  
Location: \_\_\_\_\_  
Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
Model: \_\_\_\_\_

www.MaxximumFoodService.com

## 25lb COMPACT ICE MAKER (w/ Integrated Storage Compartment)

Model: ☐ MIM25

☐ MIM25-0


International Model: Add -50 (220V/50Hz/1Ph)  
or -60 (220V/60Hz/1Ph)




MIM25



MIM25-0



Contour  
View



Bottom  
View


**Crescent Shaped Cubes**  
Inches: 2.5 x .5 x 1  
mm: 63.5 x 13 x 25.4

### REFRIGERANT

- CFC & HCFC free R-134A

### ELECTRIC

120V/60Hz/1 Ph (NEMA 5-15P)



NEMA 5-15P

These compact Ice Makers with a stainless steel door can produce up to 22 pounds of ice per day under optimal conditions. 12 pound storage bin within a refrigerated compartment minimizes any ice melt related to storing the harvested crescent shaped ice. Suitable for free-standing or built in applications. Runs on standard household electrical current. NSF 12 and UL 563 approved for commercial use. Wall outlet and water supply required. No drain connection is necessary.

### ICE PRODUCTION

Air Temp 70°F (21°C) Water Temp 50°F (10°C)

MIM25:	19 lbs (8.6 kg)
MIM25-O:	17.1 lbs (7.8 kg)

Air Temp 90°F (32°C) Water Temp 70°F (21°C)

MIM25:	14.5 lbs (6.6 kg)
MIM25-O:	12.8 lbs (5.8 kg)

Storage Bin holds 12 lbs (5.4 kg) of ice with automatic overflow prevention

### OPERATING REQUIREMENTS

Ambient Temp Range 50° to 99°F (10° to 37°C)

Water Temp Range 40° to 90°F (4° to 32°C)

Water Usage 100lbs (45.4 kg) of Ice 12.1 Gallons (46L)

Water Supply Line Connection 3/8" FPT

Water Pressure Range

Min PSI 15 Max PSI 80 (above 80 requires a regulator)

Min Bar 1.0 Max Bar 5.5

Energy Consumption kWh/100 lb at 90°F (air) /70°F (water)

MIM25: 20.9 kWh/100 lb of ice production

MIM25-O: 26.7 kWh/100 lb of ice production

### FEATURES and CONSTRUCTION

- Produces crescent ice cubes in a 12 lb storage bin
- Automatic overflow prevention
- Stainless steel door
- Refrigerated storage compartment to inhibit ice melt
- Air-cooled condenser
- Designed for household or commercial use for freestanding or built-in applications
- The MIM25-0 exterior is made from stainless steel for outdoor applications and greater durability.
- Includes; Scoop, tubing for water supply line and NEMA 5-15 cord set for simple installation

\* Water Filter Recommended



Certified to  
ANSI-NSF 12



Certified to  
ANSI UL 563



### Maxx Ice WARRANTY (USA / CANADA)

One (1) year parts

One (1) year on-site labor

Five (5) years compressor (part only)

Administered by The Legacy Companies, 877.368.2797

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

6/8/17 D



The Legacy Companies  
3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
Sales: (954) 202-7419 • Sales@TheLegacyCompanies.com  
Tech Service: (877) 368-2797 • Service@MaxxHelp.com

Project Name: \_\_\_\_\_  
Location: \_\_\_\_\_  
Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
Model: \_\_\_\_\_


www.MaxximumFoodService.com

## 25lb SELF CONTAINED ICE MAKER (w/ Integrated Ice Bin)

### MIM25




#### Front View




Door Width: 14.25 in / 362 mm  
Door Height: 19.6 in / 499 mm

#### Side View

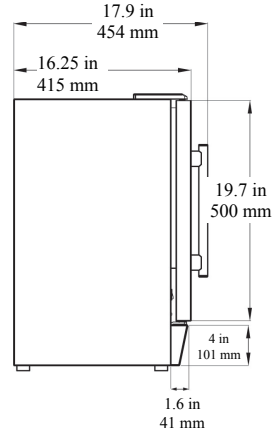

#### Top View (Both Models)

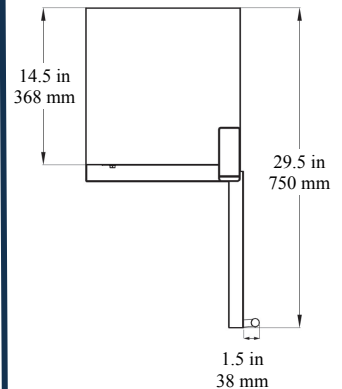


### MIM25-O




**Stainless Steel exterior for outdoor installations**

#### Front View




Door Width: 14.25 in / 362 mm  
Door Height: 19.6 in / 499 mm

#### Side View



#### Back View (Both Models)

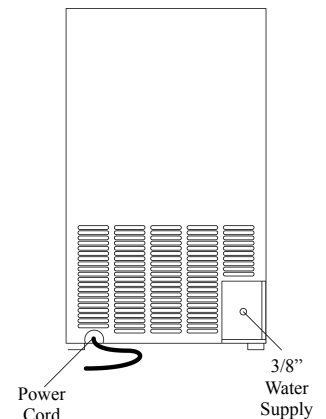

	MIM25	MIM25-O
External Dimensions W x D x H: (in)	14.6 x 17.9 x 24.5	14.6 x 17.9 x 24.5
External Dimensions W x D x H: (mm)	370 x 454 x 622	370 x 454 x 622
Average Amp Draw	1.1 amps at 115V/60Hz	1.24 amps at 115V/60Hz
Peak Amp Draw	6.3 amps at 115V/60Hz	6.5 amps at 115V/60Hz
Unit Weight	60 lb / 27 kg	60 lb / 27 kg
Shipping Weight	66 lb / 30 kg	66 lb / 30 kg
Finish	Black Body, Stainless Steel Door	Stainless Steel
Standard Electrical Connection	NEMA 5-15 Outlet / 6' cord set provided	NEMA 5-15 Outlet / 6' cord set provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.  
While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.  
By using the information provided, the user assumes all risks in connection with such use.