



The Legacy Companies  
3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
Sales: (954) 202-7419 • Sales@TheLegacyCompanies.com  
Tech Service: (877) 368-2797 • Service@MaxxHelp.com

Project Name: \_\_\_\_\_  
Location: \_\_\_\_\_  
Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
Model: \_\_\_\_\_

www.MaxximumFoodService.com

## SELF CONTAINED PREMIUM INDOOR ICE MAKER

Model: ☐ MIM50P

International Model: Add -50 (220V/50Hz/1Ph)  
or -60 (220V/60Hz/1Ph)



The MIM50P Premium Compact Indoor Ice Maker comes with a drain pump, metal ice scoop and produces up to 65 lbs of slab cubed ice per day. It also includes a self-contained 25 pound storage bin and an internal LED light that turns on when the door opens. Suitable for freestanding or built in applications, the stainless steel outer cabinet with stainless door looks good in any setting. The MIM50P runs on standard household electrical current. UL approved for commercial use.

### ICE PRODUCTION

Air Temp 70°F (21°C)	Water Temp 50°F (10°C)
Daily Ice Production:	65 lbs (23kg)
Energy Consumption	10.1kWh/100lb of ice produced
Water Usage	13.8 gal./100lb of ice produced

Air Temp 90°F (32°C)	Water Temp 70°F (21°C)
Daily Ice Production:	51 lbs (31kg)

Storage Bin holds 25lbs of ice with automatic overflow prevention  
Gravity Drain connection is required, along with a water supply line.

### OPERATING REQUIREMENTS

Ambient Temperature Range	50° to 99°F (10° to 37°C)
Water Temperature Range	40° to 90°F (4° to 32°C)
Water Supply Line Connection	1/4" O.D. Compression
Water Pressure Range	
Min PSI 15	Max PSI 75 (above 75 requires a regulator)
Min Bar 1.0	Max Bar 5.5

### FEATURES and CONSTRUCTION

- Exterior Material: Stainless Steel
  - Air Cooled Compressor
  - Adjustable, sturdy plastic legs
  - Internal LED light when door is open
  - Built-In Self Cleaning Mode for use with nickel safe cleaning solution
  - Includes: Scoop
  - Tubing for Supply and Drain Lines
  - NEMA 5-15 cord set for simple installation
- \* A Water filter is recommended for a more efficient operation with less required maintenance and cleaning.  
\* 3<sup>rd</sup> Party Approvals: ANSI NSF 12, ANSI UL 563 & DOE2017

### REFRIGERANT

- CFC & HCFC free R-134A

### ELECTRIC

120V/60Hz/1 Ph (NEMA 5-15P)  
(220V/50Hz/1ph available as an option)



Certified to  
ANSI-NSF 12



Certified to  
ANSI UL 563



### Maxx Ice WARRANTY (USA / CANADA)

One (1) year parts  
One (1) year on-site labor  
Five (5) years compressor (part only)  
Administered by The Legacy Companies, 877.368.2797

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

5/16/17 D




The Legacy Companies  
3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
Sales: (954) 202-7419 • Sales@TheLegacyCompanies.com  
Tech Service: (877) 368-2797 • Service@MaxxHelp.com

Project Name: \_\_\_\_\_  
Location: \_\_\_\_\_  
Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
Model: \_\_\_\_\_

www.MaximumFoodService.com

## SELF CONTAINED PREMIUM INDOOR ICE MAKER

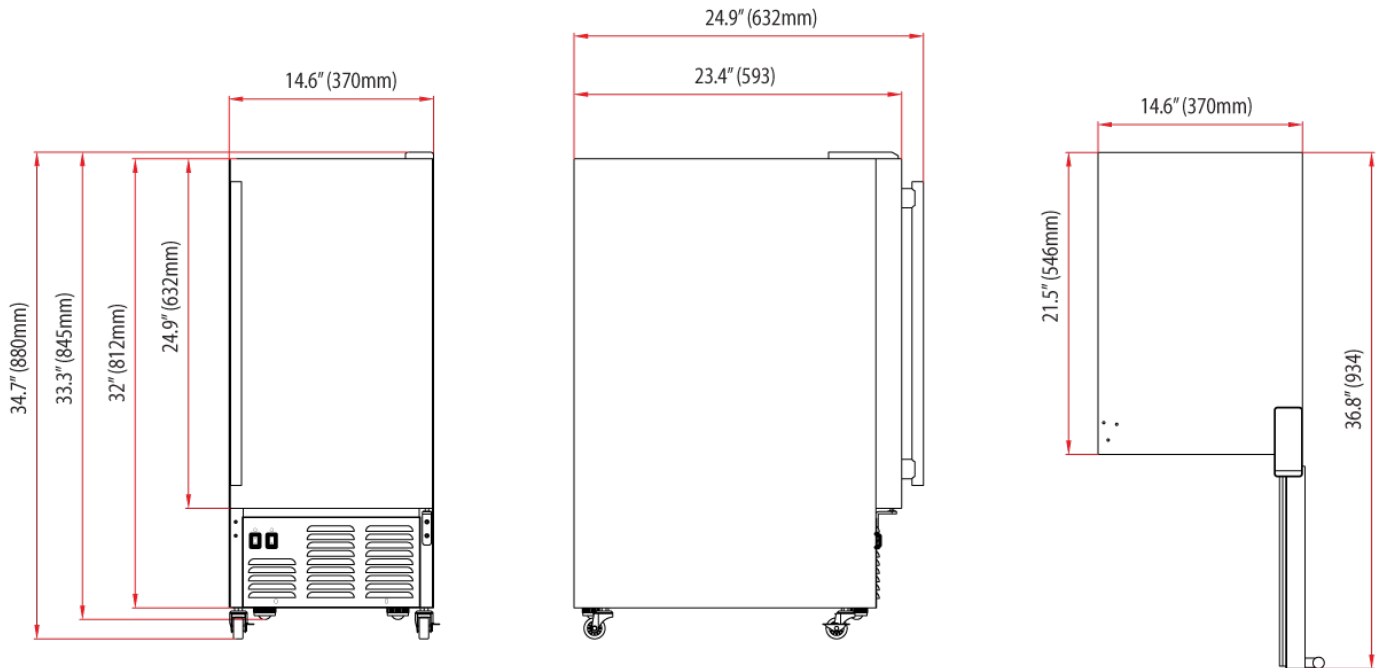

	MIM50P
In: External Dimensions W x D X H	14.6 x 25 x 34.7
mm: External Dimensions W x D X H	370 x 632 x 880
Average Amp Draw	1.9
Unit Weight	83 lb / 37 kg
Shipping Weight	93 lb / 42 kg
Production based on ambient conditions	
50°F Water / 70°F Air	Up to 65 lbs of ice/day
70°F Water / 90°F Air	Up to 51 lbs of ice/day
Ice Cube Produced (Dimensions)	Clear Slab Cube (3/4 x 3/4 x 1" / 19 x 19 x 25mm)

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.  
While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.  
By using the information provided, the user assumes all risks in connection with such use.