



MAXX COLD X-series


Project Name:	
Location:	
Item:	Qty:
Model:	

MXCB48 / MXCB60 / MXCB72


CHEF BASES



MXCB48
(48")

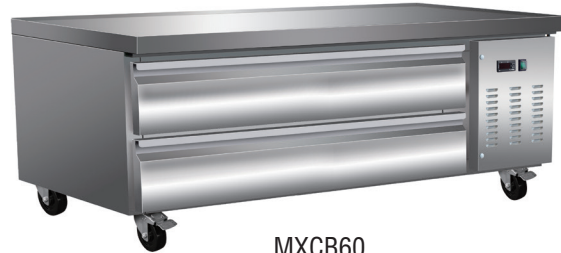

MXCB60
(62")

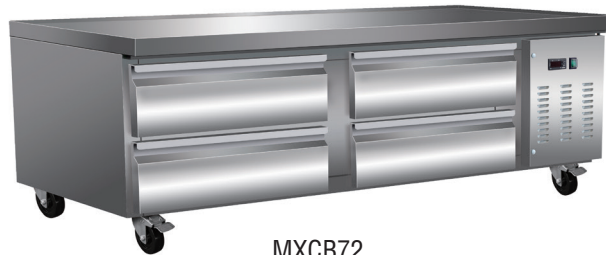

MXCB72
(74")

FEATURES

- Urethane insulated walls and doors
- Recessed drawer handles
- 5" casters standard
- Utilizes environmentally friendly refrigerants using R134A
- Forced-air refrigeration
- Efficient cooling system
- Automatic defrost system
- Available in 115V/60Hz/1 and 230V/50Hz/1

MODEL	TEMP	VOLTAGE/HZ	AMPS	CORD LENGTH	COMPRESSOR	NEMA PLUG
MXCB48	33° - 41°F 0.5° - 5°C	115V/60Hz/1 230V/50Hz/1	5.8	9.8 ft 3 m	~1/2 HP	5-15 P
MXCB60	33° - 41°F 0.5° - 5°C	115V/60Hz/1 230V/50Hz/1	5.8	9.8 ft 3 m	~1/2 HP	5-15 P
MXCB72	33° - 41°F 0.5° - 5°C	115V/60Hz/1 230V/50Hz/1	5.8	9.8 ft 3 m	~1/2 HP	5-15 P



Specifications subject to change without notice.

Approvals: ETL, CETL, ETL Sanitation approved

MXCB48 / MXCB60 / MXCB72



MAXX COLD X-series


MXCB48: 845035010613 | MXCB60: 845035010620 | MXCB72: 845035010637

MXCB48 / MXCB60 / MXCB72


CHEF BASES

DIMENSIONS


MXCB48

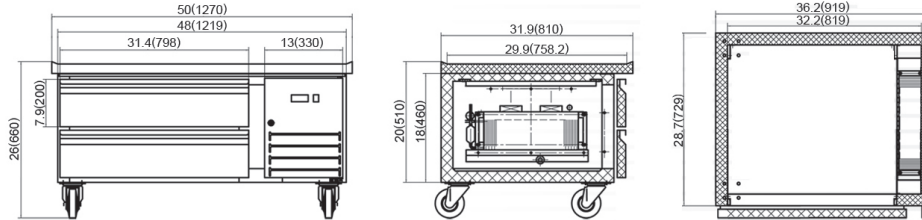

MXCB60

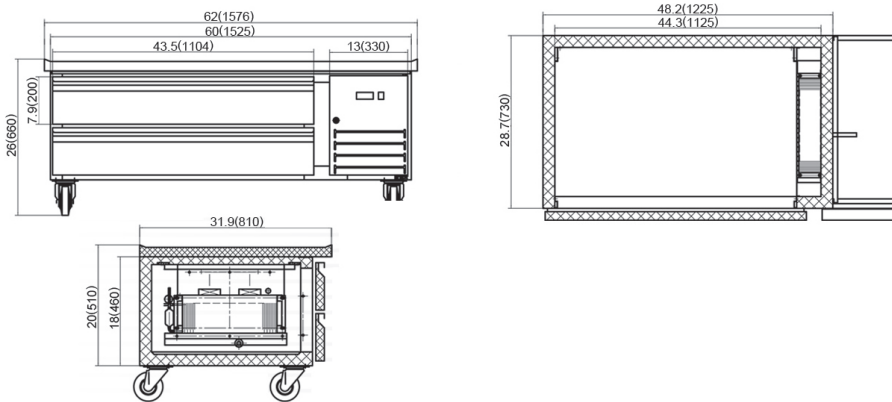

MXCB72

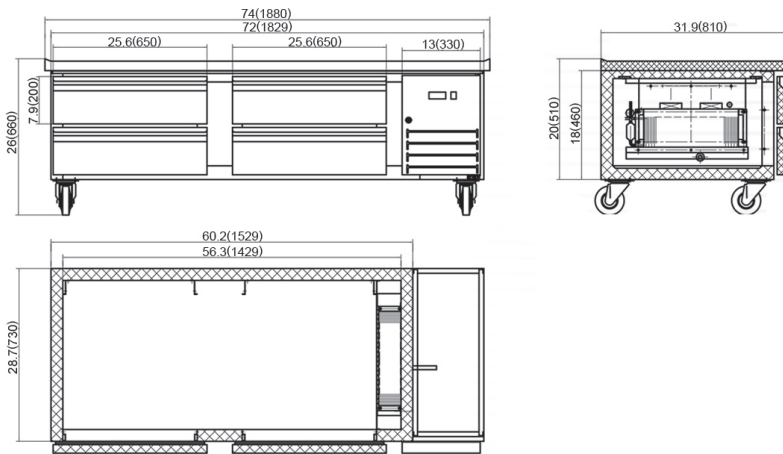

MODEL	DIMENSIONS (W"xH"xD")	SHIPPING DIMS (W"xH"xD")	CAPACITY	DRAWERS	NET WEIGHT	SHIP WEIGHT
MXCB48	50 x 31.9 x 26 1270 x 775 x 638mm	51.2 x 32.9 x 27.8 1300 x 836 x 706mm	6.5 Cu Ft 184 L	2	234 lb 106 kg	260 lb 118 kg
MXCB60	62 x 31.9 x 26 1575 x 775 x 638mm	63.2 x 32.9 x 27.8 1605 x 836 x 706mm	8.8 Cu Ft 249 L	2	269 lb 122 kg	302 lb 137 kg
MXCB72	74 x 31.9 x 26 1879.6 x 775 x 638mm	75.2 x 32.9 x 27.8 1910 x 836 x 706mm	11.1 Cu Ft 314.3 L	4	313 lb 142 kg	353 lb 160 kg