



Maxx Cold X-series | The Legacy Companies  
 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401  
 www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

Project Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Model: \_\_\_\_\_

# MEGATOP UNITS

Model:  MXCR29M  MXCR48M  MXCR60M  MXCR72M

International Model:  
 Add -50 (220V/50Hz/1Ph)



MXCR29M



MXCR48M



MXCR60M



MXCR72M

Maxx Cold X-Series Mega Tops offer additional pan space for increased capacity and flexibility. A high quality stainless steel exterior allows for easy cleaning and ensures durability and years of reliable service. A heavy duty stainless steel insulated hood keeps products cool and fresh.

## FEATURES

- Easy to grip recessed door handles
- 4 Casters (2 locking, 2 non-locking)
- Adjustable, heavy-duty wire shelves (1 per section/door)
- Single door section (20" wide) will hold full sized sheet pans
- Available in multiple sizes to suit your needs
- Available in 120V/60Hz, 220V/50Hz & 220V/60Hz

## TEMPERATURE

- Holding temperature: 33° to 41°F (1° to 5°C)
- Utilizes environmentally friendly refrigerant R134A
- Forced-air refrigeration
- Efficient cooling system

## CONSTRUCTION

- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Coated aluminum
- CFC Free Polyurethane insulated walls and doors
- Standard recessed door handles


## REFRIGERANT

Environmentally-friendly R-134A propane

## ELECTRIC

120/60Hz/1 Ph (NEMA 5-15)  
 Cord set includes plug & 9.8' (3m) cord  
 220V/50Hz/1 & 220V/60Hz/1 available options

1.27" / 32 mm



NEMA 5-15P



Certified to  
 ANSI-NSF 7



Certified to  
 ANSI UL 471


## Maxx Cold X-Series WARRANTY (USA / CANADA)

One (1) year parts  
 One (1) year on-site labor  
 Four additional (4) years compressor (part only)  
 Administered by The Legacy Companies, 877.368.2797  
 24/7 tech support provided

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

# MEGATOP UNITS

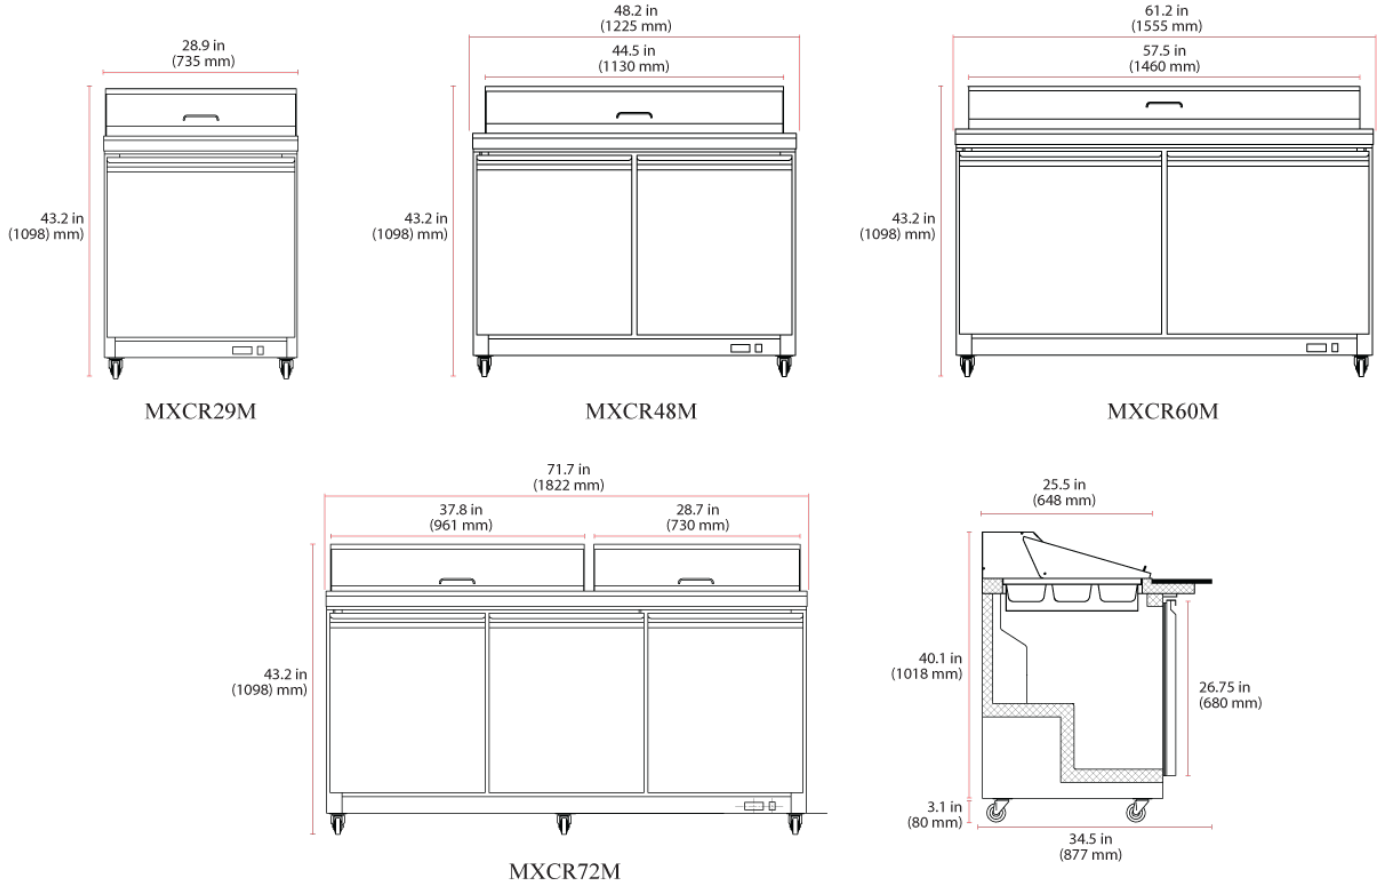

	Dimensions in / mm	Capacity	Temperature Range	Voltage	Unit Weight	Doors	Pans (1/6)
<b>MXCR29M</b>	28.9 x 34.5 x 43.2 735 x 877 x 1098	7 Cu Ft 198 L	33° - 41° F 1° - 5° C	120V/60Hz 220V/50Hz, 220V/60Hz	276 lb 125 kg	1	12
<b>MXCR48M</b>	48.2 x 34.5 x 43.2 1225 x 877 x 1098	12 Cu Ft 340 L	33° - 41° F 1° - 5° C	120V/60Hz 220V/50Hz, 220V/60Hz	313 lb 142 kg	2	18
<b>MXCR60M</b>	61.2 x 34.5 x 43.2 1555 x 877 x 1098	15.5 Cu Ft 439 L	33° - 41° F 1° - 5° C	120V/60Hz 220V/50Hz, 220V/60Hz	362 lb 164 kg	2	24
<b>MXCR72M</b>	71.7 x 34.5 x 43.2 1822 x 877 x 1098	18 Cu Ft 510 L	33° - 41° F 1° - 5° C	120V/60Hz 220V/50Hz	408 lb 185 kg	3	30

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.