

2019 PRODUCT CATALOG  
❄️ **MAXX COLD**  
❄️ **MAXX ICE**



# MAXXIMUM

A DIVISION OF THE LEGACY COMPANIES

Maximum features a full line of quality products to meet your refrigeration and ice machine needs. Maximum quality, durability, performance and value. That's what you get with Maxx Cold refrigeration and Maxx Ice ice machines.



## MAXX COLD

The ultimate choice for an all stainless steel refrigerator or freezer. Designed with style and energy savings in mind these units look right at home in any setting while providing unequalled quality and performance.

## MAXX COLD *X-series*

When you're looking for the maximum in savings, X marks the spot. The ultimate in value with a stainless exterior and coated aluminum interior these units are designed with features usually reserved for higher priced units. Quality and value are at the X.

## MAXX ICE

The clear choice for quality ice. Maxx Ice represents the most efficient and cost effective method of meeting your ice needs. Designed to incorporate maximum energy and water conservation and built to produce ice simply and efficiently, Maxx Ice is the clear choice for maximum value.



# TABLE OF CONTENTS



|   |           |
|---|-----------|
| Reach-in Refrigeration/Freezer .....                                | 1-3       |
| Reach-in Refrigeration: Glass Door .....                            | 4         |
| Reach-in Refrigeration: Economy .....                               | 5-7       |
| Beverage Blaster .....  | 8         |
| Merchandisers: Countertop .....                                     | 9         |
| Merchandisers: Glass Door .....                                     | 10        |
| Undercounter Refrigeration/Freezer with Doors .....                 | 11-13, 15 |
| Undercounter Refrigeration/Freezer with Drawers .....               | 14        |
| Sandwich Stations with Doors .....                                  | 16-18     |
| Sandwich Stations with Drawers .....                                | 19        |
| Megatop Preparation Units with Doors .....                          | 20-21     |
| Pizza Preparation with Doors .....                                  | 22,24     |
| Pizza Preparation with Drawers .....                                | 23        |
| Worktop Refrigeration /Freezer .....                                | 25        |
| Chef Bases .....  | 26        |
| Milk Coolers .....  | 27        |
| Dipping Cabinets .....  | 28        |
| Mobile Ice Cream Freezers .....                                     | 29        |
| Curved Top Glass Display Freezers .....                             | 30        |
| Chest Freezers: Solid Top .....                                     | 31-32     |
| Chest Freezers: Glass Top .....                                     | 33        |
| Bottle Coolers .....  | 34        |
| Keg Coolers .....   | 35, 37-38 |
| Keg Coolers Tower Options .....                                     | 36        |
| Back Bar Coolers .....  | 39-40     |
| Compact Indoor/Outdoor Refrigeration .....                          | 41        |
| Wine Coolers .....  | 41        |
| Ice Makers: Self Contained .....                                    | 42-45     |
| Ice Makers: Modular .....   | 46-47     |
| Ice Makers: Hotel Ice Dispenser .....                               | 48        |
| Ice Makers: Bins .....  | 49        |
| Accessories: Pan Racks, Backsplash, Drawers and Water Filters ..... | 50        |
| Details on Ice Cube Sizes .....                                     | 51        |



## MODEL # PAGE

|                  |    |                 |    |                    |    |                    |    |                  |    |                      |    |
|------------------|----|-----------------|----|--------------------|----|--------------------|----|------------------|----|----------------------|----|
| BIN650 .....     | 49 | MCWC28-O .....  | 41 | MXBB90 .....       | 40 | MXCPP92-DM .....   | 23 | MXCR72WT .....   | 25 | MXM2-48RB .....      | 6  |
| BIN950 .....     | 49 | MIB280N .....   | 49 | MXBB90G .....      | 40 | MXCPP92-DMR .....  | 23 | MXDC-4 .....     | 28 | MXM2-48RS .....      | 6  |
| BLASTER380 ..... | 8  | MIB430N .....   | 49 | MXBD24-1B .....    | 37 | MXCPP92-DR .....   | 23 | MXDC-8 .....     | 28 | MXM2-48RSB .....     | 6  |
| MCBB24-1BG ..... | 39 | MID200X .....   | 48 | MXBD48-1B .....    | 37 | MXCR-19FDHC .....  | 3  | MXDC-12 .....    | 28 | MXM3-72F .....       | 6  |
| MCBB60-2BG ..... | 39 | MIM25 .....     | 42 | MXBD48-2B .....    | 37 | MXCR-23FD .....    | 3  | MXF25CHC-2 ..... | 30 | MXM3-72FB .....      | 6  |
| MCBB70-2B .....  | 39 | MIM25-0 .....   | 42 | MXBD60-1B .....    | 37 | MXCR-49FD .....    | 3  | MXF31F .....     | 29 | MXM3-72R .....       | 6  |
| MCBB70-2BG ..... | 39 | MIM50 .....     | 42 | MXBD60-2B .....    | 37 | MXCR-72FD .....    | 3  | MXF32CHC-3 ..... | 30 | MXM3-72RB .....      | 6  |
| MCBB90-3B .....  | 39 | MIM50-0 .....   | 42 | MXBD72-2B .....    | 37 | MXCR-23GD .....    | 4  | MXF40CHC-4 ..... | 30 | MXSF-23FD .....      | 5  |
| MCBC3U .....     | 41 | MIM50P .....    | 42 | MXBD24-1S .....    | 38 | MXCR-49GD .....    | 4  | MXF48CHC-5 ..... | 30 | MXSF-29U .....       | 13 |
| MCBC3U-O .....   | 41 | MIM50V .....    | 42 | MXBD48-1S .....    | 38 | MXCR27U-FBHC ..... | 13 | MXF52F .....     | 29 | MXSF-48U .....       | 13 |
| MCBD24-1B .....  | 35 | MIM75 .....     | 45 | MXBD48-2S .....    | 38 | MXCR27U .....      | 13 | MXF54CHC-6 ..... | 30 | MXSF-60U .....       | 13 |
| MCBD70-2B .....  | 35 | MIM80 .....     | 45 | MXBD60-1S .....    | 38 | MXCR27U-D .....    | 14 | MXF64CHC-7 ..... | 30 | MXSF-49FD .....      | 5  |
| MCCB54 .....     | 26 | MIM85H .....    | 45 | MXBD60-2S .....    | 38 | MXCR29M .....      | 21 | MXF71F .....     | 29 | MXM3-72RS .....      | 6  |
| MCCB72 .....     | 26 | MIM100 .....    | 46 | MXBD72-2S .....    | 38 | MXCR29M-D .....    | 20 | MXF72CHC-8 ..... | 30 | MXM3-72RSB .....     | 6  |
| MCF-23FD .....   | 1  | MIM120 .....    | 45 | MXCB48 .....       | 26 | MXCR29S .....      | 17 | MXH10.6C .....   | 31 | MXMC34HC .....       | 27 |
| MCF-49FD .....   | 1  | MIM125H .....   | 45 | MXCB60 .....       | 26 | MXCR29S-D .....    | 19 | MXH10.6F .....   | 31 | MXMC49HC .....       | 27 |
| MCF27U .....     | 12 | MIM130 .....    | 45 | MXCB72 .....       | 26 | MXCR48M .....      | 21 | MXH14.2C .....   | 31 | MXMC58HC .....       | 27 |
| MCF48U .....     | 12 | MIM150N .....   | 44 | MXCF-19FDHC .....  | 3  | MXCR48M-DL .....   | 20 | MXH14.2F .....   | 31 | MXSPP-50 .....       | 24 |
| MCF60U .....     | 12 | MIM150NH .....  | 44 | MXCF-23FD .....    | 3  | MXCR48M-DLR .....  | 20 | MXSH19.4S .....  | 28 | MXSPP-70 .....       | 24 |
| MCF72U .....     | 12 | MIM200N .....   | 44 | MXCF-49FD .....    | 3  | MXCR48M-DR .....   | 20 | MXSH23.6S .....  | 28 | MXSPP-92 .....       | 24 |
| MCFT-23FD .....  | 2  | MIM200NH .....  | 44 | MXCF-72FD .....    | 3  | MXCR48S .....      | 17 | MXSH30.0S .....  | 28 | MXSR-23FD .....      | 5  |
| MCFT-49FD .....  | 2  | MIM250 .....    | 45 | MXCF27U .....      | 13 | MXCR48S-DL .....   | 19 | MXH3.5S .....    | 26 | MXSR-23GD .....      | 5  |
| MCFT-72FD .....  | 2  | MIM260N .....   | 44 | MXCF27U-D .....    | 14 | MXCR48S-DLR .....  | 19 | MXH7.1S .....    | 26 | MXSR-29U .....       | 15 |
| MCR-23FD .....   | 1  | MIM260NH .....  | 44 | MXCF48U .....      | 13 | MXCR48S-DR .....   | 19 | MXM1-12F .....   | 6  | MXSR-48U .....       | 15 |
| MCR-49FD .....   | 1  | MIM265H .....   | 45 | MXCF48U-DL .....   | 14 | MXCR48U .....      | 13 | MXM1-12FB .....  | 6  | MXSR-60U .....       | 15 |
| MCR27M .....     | 20 | MIM320N .....   | 44 | MXCF48U-DLR .....  | 14 | MXCR48U-DL .....   | 14 | MXM1-12R .....   | 6  | MXSR-29S .....       | 18 |
| MCR27S .....     | 16 | MIM320NH .....  | 44 | MXCF48U-DR .....   | 14 | MXCR48U-DLR .....  | 14 | MXM1-12RB .....  | 6  | MXSR-48S .....       | 18 |
| MCR27U .....     | 12 | MIM370N .....   | 43 | MXCF60U .....      | 13 | MXCR48U-DR .....   | 14 | MXM1-16F .....   | 6  | MXSR-60S .....       | 18 |
| MCR3U .....      | 41 | MIM370NH .....  | 43 | MXCF60U-DL .....   | 14 | MXCR50B .....      | 34 | MXM1-16FB .....  | 6  | MXSR-49FD .....      | 5  |
| MCR3U-O .....    | 41 | MIM452 .....    | 46 | MXCF60U-DLR .....  | 14 | MXCR60M .....      | 21 | MXM1-16R .....   | 6  | MXSR-49GD .....      | 5  |
| MCR5U-O .....    | 41 | MIM475H .....   | 46 | MXCF60U-DR .....   | 14 | MXCR60S .....      | 17 | MXM1-16RB .....  | 6  | MXX-23F .....        | 7  |
| MCR48M .....     | 20 | MIM600 .....    | 46 | MXCF72U .....      | 13 | MXCR60S-DL .....   | 19 | MXM1-2.5F .....  | 8  | MXX-23R .....        | 7  |
| MCR48S .....     | 16 | MIM615H .....   | 42 | MXCF27WT .....     | 25 | MXCR60S-DLR .....  | 19 | MXM1-2.5R .....  | 8  | ICE CUBE SIZES ..... | 51 |
| MCR48U .....     | 12 | MIM650N .....   | 43 | MXCF48WT .....     | 25 | MXCR60S-DR .....   | 19 | MXM1-23F .....   | 6  |                      |    |
| MCR60M .....     | 20 | MIM650NH .....  | 43 | MXCF60WT .....     | 25 | MXCR60U .....      | 13 | MXM1-23FB .....  | 6  |                      |    |
| MCR60S .....     | 16 | MIM915H .....   | 46 | MXCPP50 .....      | 22 | MXCR60U-DL .....   | 14 | MXM1-23R .....   | 6  |                      |    |
| MCR60U .....     | 12 | MIM1000 .....   | 43 | MXCPP50-D .....    | 23 | MXCR60U-DLR .....  | 14 | MXM1-23RB .....  | 6  |                      |    |
| MCR72M .....     | 20 | MIM1000N .....  | 43 | MXCPP70 .....      | 22 | MXCR60U-DR .....   | 14 | MXM1-2F .....    | 9  |                      |    |
| MCR72S .....     | 16 | MIM1000NH ..... | 43 | MXCPP70-DL .....   | 23 | MXCR65B .....      | 34 | MXM1-2R .....    | 9  |                      |    |
| MCR72U .....     | 12 | MMAR25B .....   | 43 | MXCPP70-DLR .....  | 23 | MXCR72M .....      | 21 | MXM1-3.5F .....  | 9  |                      |    |
| MCRT-23FD .....  | 2  | MMAR25S .....   | 43 | MXCPP70-DR .....   | 23 | MXCR72S .....      | 17 | MXM1-3.5R .....  | 9  |                      |    |
| MCRT-49FD .....  | 2  | MMAR25W .....   | 43 | MXCPP92 .....      | 22 | MXCR72U .....      | 13 | MXM1-4F .....    | 9  |                      |    |
| MCRT-72FD .....  | 2  | MXBB60 .....    | 40 | MXCPP92-DL .....   | 23 | MXCR96B .....      | 34 | MXM1-4R .....    | 9  |                      |    |
| MCWC28 .....     | 41 | MXBB60G .....   | 40 | MXCPP92-DLM .....  | 23 | MXCR27WT .....     | 25 | MXM2-48F .....   | 6  |                      |    |
| MECR-31D .....   | 10 | MXBB70 .....    | 40 | MXCPP92-DLMR ..... | 23 | MXCR48WT .....     | 25 | MXM2-48FB .....  | 6  |                      |    |
| MECR-32D .....   | 10 | MXBB70G .....   | 40 | MXCPP92-DLR .....  | 23 | MXCR60WT .....     | 25 | MXM2-48R .....   | 6  |                      |    |

- Stainless steel exterior and interior ensures years of long life and maximum durability
- CFC-free polyurethane foam insulation
- (3) heavy-duty, adjustable, PE coated wire shelves per section
- Door locks and 4" diameter swivel casters with front brakes are standard
- Utilizes CFC & HCFC-free refrigerant, Refrigerator R134A / Freezer - R404A Freezer MCF-23FD - tR134A
- Automatic defrost system
- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior
- Holding temperature:  
Refrigerator: 33°F to 41°F, Freezer: -10°F to 10°F
- Open door alert, beeps when door has been open for 3 minutes
- Large evaporator and condenser for quick cooling and greater efficiency
- Automatic interior lighting
- Self contained system
- Single door units are field reversible (additional parts required)
- Single self closing door, stays open past 90 degrees
- Single doors will hold full sized sheet pans
- Recessed handles
- Available in 120V/60Hz, 220V/50Hz, 230V/60Hz
- \* Energy Star listed



Maxx Cold reach-in refrigeration is built to last. Temperature is digitally controlled and easily viewed from the exterior of the cabinet. Stainless steel construction ensures years of long life and maximum durability. Maxx Cold units are designed to meet the requirements of the most discriminating customer.



MCR-23FD\*  
MCF-23FD\*



MCR-49FD\*  
MCF-49FD\*



MCR-72FD\*  
MCF-72FD\*

| Model                 | Dim (W"xD"xH")                            | Capacity           | Temp                           | Doors | Weight           | Shelves |
|-----------------------|---|--------------------|--------------------------------|-------|------------------|---------|
| MCR-23FD Refrigerator | 26.75 x 31 x 82.75<br>680 x 787 x 2102 mm | 23 Cu Ft<br>651 L  | 33° to 41°F<br>1° to 5°C       | 1     | 271 lb<br>123 kg | 3       |
| MCF-23FD Freezer      | 26.75 x 31 x 82.75<br>680 x 787 x 2102 mm | 23 Cu Ft<br>651 L  | -10° to 10° F<br>-23° to 12° C | 1     | 284 lb<br>129 kg | 3       |
| MCR-49FD Refrigerator | 54 x 31 x 82.75<br>1370 x 787 x 2102 mm   | 49 Cu Ft<br>1387 L | 33° to 41°F<br>1° to 5°C       | 2     | 397 lb<br>180 kg | 6       |
| MCF-49FD Freezer      | 54 x 31 x 82.75<br>1370 x 787 x 2102 mm   | 49 Cu Ft<br>1387 L | -10° to 10° F<br>-23° to 12° C | 2     | 403 lb<br>183 kg | 6       |
| MCR-72FD Refrigerator | 81 x 31 x 82.75<br>2057 x 787 x 2102 mm   | 72 Cu Ft<br>2039 L | 33° to 41°F<br>1° to 5°C       | 3     | 634 lb<br>287 kg | 9       |
| MCF-72FD Freezer      | 81 x 31 x 82.75<br>2057 x 787 x 2102 mm   | 72 Cu Ft<br>2039 L | -10° to 10° F<br>-23° to 12° C | 3     | 650 lb<br>295 kg | 9       |



## TOP MOUNT REACH-IN REFRIGERATION



# MAXX COLD

Maxx Cold top mounted compressor reach-in refrigeration is built to last. Temperature is digitally controlled and easily viewed from the exterior of the cabinet. Stainless steel construction ensures years of long life and maximum durability. Maxx Cold units are designed to meet the requirements of the most discriminating customer.



MCRT-23FD  
MCFT-23FD



MCRT-49FD  
MCFT-49FD



MCRT-72FD  
MCFT-72FD

- Stainless steel exterior and aluminum (1+2 door) or stainless steel (3 door) interior ensures years of long life and maximum durability
- CFC-free polyurethane foam insulation
- (3) heavy-duty, adjustable, PE coated wire shelves per section
- Door locks and 4" diameter swivel casters with front brakes are standard
- Utilizes CFC & HCFC-free refrigerant, refrigerator R134A / Freezer - R404A
- Automatic defrost system
- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior
- Holding temperature:  
Refrigerator: 33°F to 41°F, Freezer: -10°F to 10°F
- Open door alert, beeps when door has been open for 3 minutes
- Large evaporator and condenser for quick cooling and greater efficiency
- Automatic interior lighting
- Self contained system
- Single self closing door, stays open past 90 degrees
- Single doors will hold full sized sheet pans
- Recessed handles
- Available in 120V/60Hz, 220V/50Hz, 230V/60Hz



| Model                     | Dim (W"xD"xH")                       | Capacity           | Temp                           | Doors | Weight           | Shelves |
|---------------------------|--------------------------------------|--------------------|--------------------------------|-------|------------------|---------|
| MCRT-23FD<br>Refrigerator | 27 x 31 x 82<br>681 x 787 x 2078 mm  | 19 Cu Ft<br>541 L  | 33° to 41°F<br>1° to 5°C       | 1     | 264 lb<br>120 kg | 3       |
| MCFT-23FD<br>Freezer      | 27 x 31 x 82<br>681 x 787 x 2078 mm  | 19 Cu Ft<br>541 L  | -10° to 10° F<br>-23° to 12° C | 1     | 273 lb<br>124 kg | 3       |
| MCRT-49FD<br>Refrigerator | 54 x 31 x 82<br>1370 x 787 x 2078 mm | 49 Cu Ft<br>1387 L | 33° to 41°F<br>1° to 5°C       | 2     | 388 lb<br>190 kg | 6       |
| MCFT-49FD<br>Freezer      | 54 x 31 x 82<br>1370 x 787 x 2078 mm | 49 Cu Ft<br>1387 L | -10° to 10° F<br>-23° to 12° C | 2     | 418 lb<br>190 kg | 6       |
| MCRT-72FD<br>Refrigerator | 81 x 31 x 82<br>2060 x 787 x 2078 mm | 72 Cu Ft<br>2039 L | 33° to 41°F<br>1° to 5°C       | 3     | 567 lb<br>257 kg | 9       |
| MCFT-72FD<br>Freezer      | 81 x 31 x 82<br>2060 x 787 x 2078 mm | 72 Cu Ft<br>2039 L | -10° to 10° F<br>-23° to 12° C | 3     | 595 lb<br>270 kg | 9       |



# MAXX COLD

## X-series

## REACH-IN REFRIGERATION

- Stainless steel exterior, painted aluminum interior and stainless steel interior floor
- (3) heavy-duty, adjustable, PE coated wire shelves per section
- Door locks and swivel casters come standard
- Refrigerant:
  - MXCR-19FDHC/MXCF-19FDHC: R290A
  - MXCR-23/49/72: R134A
  - MXCF-23/49/72: R404A
- Automatic defrost system
- Holding temperature:
  - Refrigerator: 33°F to 41°F
  - Freezer: -10°F to 10°F
- Top Mount Compressor
- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior
- Oversized evaporator and condenser for quick cooling and greater efficiency
- Automatic interior lighting
- Self contained system
- Recessed handles
- 120V/60Hz/1 Ph (NEMA 5-15P)
- MXCF19-FDHC/23FD/49FD: 120V/60Hz/1 Ph (NEMA 5-15P)
- MXCF72FD: 208-230V/60Hz/1 Ph (NEMA L14-20)

\* Energy Star listed



DOE 2017  
Compliant

Maxx Cold X-Series Reach-Ins construction ensures years of long life and maximum durability. Temperature is digitally controlled and easily viewed from the exterior of the cabinet.



MXCR-19FDHC  
MXCF-19FDHC

MXCR-23FD\*  
MXCF-23FD



MXCR-49FD\*  
MXCF-49FD\*



MXCR-72FD  
MXCF-72FD

| Model                       | Dim (W"xD"xH")                              | Capacity            | Temp                            | Amps | Doors | Weight           | Shelves |
|-----------------------------|---|---------------------|---------------------------------|------|-------|------------------|---------|
| MXCR-19FDHC<br>Refrigerator | 25.2 x 31.5 x 77.6<br>640 x 800 x 1970 mm   | 19 Cu Ft<br>538 L   | 33° to 41°F<br>1° to 4°C        | 8    | 1     | xxx lb<br>xxx kg | 3       |
| MXCF-19FDHC<br>Freezer      | 25.2 x 31.5 x 77.6<br>640 x 800 x 1970 mm   | 19 Cu Ft<br>538 L   | -10° to 10° F<br>-23° to -12° C | 3    | 1     | xxx lb<br>xxx kg | 3       |
| MXCR-23FD<br>Refrigerator   | 26.8 x 32.7 x 82.25<br>681 x 831 x 2090 mm  | 23 Cu Ft<br>651 L   | 33° to 41°F<br>1° to 4°C        | 6    | 1     | 282 lb<br>128 kg | 3       |
| MXCF-23FD<br>Freezer        | 26.8 x 32.7 x 82.25<br>681 x 831 x 2090 mm  | 23 Cu Ft<br>651 L   | -10° to 10° F<br>-23° to -12° C | 11   | 1     | 305 lb<br>138 kg | 3       |
| MXCR-49FD<br>Refrigerator   | 53.9 x 32.7 x 82.25<br>1369 x 831 x 2090 mm | 49 Cu Ft<br>1,387 L | 33° to 41°F<br>1° to 4°C        | 9    | 2     | 457 lb<br>207 kg | 6       |
| MXCF-49FD<br>Freezer        | 53.9 x 32.7 x 82.25<br>1369 x 831 x 2090 mm | 49 Cu Ft<br>1,387 L | -10° to 10° F<br>-23° to -12° C | 12   | 2     | 468 lb<br>212 kg | 6       |
| MXCR-72FD<br>Refrigerator   | 81 x 32.7 x 82.25<br>2057 x 831 x 2090 mm   | 72 Cu Ft<br>2,039 L | 33° to 41°F<br>1° to 4°C        | 10   | 3     | 468 lb<br>212 kg | 9       |
| MXCF-72FD<br>Freezer        | 81 x 32.7 x 82.25<br>2057 x 831 x 2090 mm   | 72 Cu Ft<br>2,039 L | -10° to 10° F<br>-23° to -12° C | 8.8  | 3     | 563 lb<br>255 kg | 9       |

## GLASS DOOR REACH-IN REFRIGERATION



# MAXX COLD

## X-series

Maxx Cold Glass Door Reach-In Refrigeration pairs durability and longevity with visual appeal. Featuring a bottom mounted compressor, the glass door refrigerators effectively keep product at exactly the right temperature while utilizing energy efficiency. The simple to use but precise digital controls allow for accurate and flexible use of the unit. For energy savings, durability, and visually appealing construction, Maxx Cold glass door refrigeration is sure to impress.



MXCR-23GD

- Exterior: Stainless steel  
Interior: Stainless steel
- CFC-free polyurethane insulated walls and doors
- (3) heavy-duty, adjustable, PE coated wire shelves per section
- 4" diameter swivel casters come standard
- Utilizes environmentally friendly CFC-free R134A refrigerant
- Bottom mount compressor provides energy savings and ease of service
- Automatic defrost system
- Digitally controlled temperature system maintains optimum temperature
- LED display is easily viewed from exterior
- Door locks included
- Automatic interior lighting
- Available in 115V/60Hz/1



DOE 2017  
Compliant



MXCR-49GD



| Model     | Dim (W"xD"xH")                             | Capacity            | Temp                     | Doors | Weight             | Shelves |
|-----------|--|---------------------|--------------------------|-------|--------------------|---------|
| MXCR-23GD | 26.8 x 31.9 x 82.3<br>681 x 810 x 2090 mm  | 23 Cu Ft<br>603 L   | 33° to 41°F<br>1° to 5°C | 1     | 293 lb<br>133 kg   | 3       |
| MXCR-49GD | 53.9 x 31.9 x 82.3<br>1370 x 810 x 2090 mm | 49 Cu Ft<br>512.5 L | 33° to 41°F<br>1° to 5°C | 2     | 478.4 lb<br>217 kg | 6       |





# MAXX COLD

## SELECT SERIES

- Stainless steel exterior and painted aluminum interior
- CFC-free polyurethane foam insulation
- 3 heavy-duty, adjustable, PE coated wire shelves per section
- Door locks and 4" swivel casters come standard (2 with brakes)
- Utilizes environmentally friendly CFC-free R404A & R-134A refrigerant
- Automatic defrost system keeps the unit at peak operating condition
- Digitally controlled temperature system maintains optimum storage temperature and is easily changed when necessary.
- Self-closing doors
- The MXSR-23FD model door is field-reversible using an available optional conversion kit
- LED display is easily viewed from exterior at a distance up to 15' away



## ECONOMY REACH-IN REFRIGERATION

Maxx Cold Select Series bottom mount reach-in refrigerator and freezers are built to last and operate efficiently for years. Temperature is digitally controlled and readily adjusted for ideal storage conditions, and easily viewed from the exterior of the cabinet.



MXSR-23FD  
MXSF-23FD



MXSR-49FD  
MXSF-49FD



MXSR-23GD



MXSR-49GD

| Model                  | Dim (W"xD"xH")                             | Capacity             | Temp                            | Doors | Weight           | Shelves                                       |
|------------------------|--|----------------------|---------------------------------|-------|------------------|---|
| MXSR-23FD Refrigerator | 27 x 33.3 x 83.5<br>686 x 846 x 2121 mm    | 19.3 Cu Ft<br>547 L  | 34° to 40°F<br>2° to 5°C        | 1     | 280 lb<br>127 kg | 3<br>(2 adjustable,<br>1 fixed<br>half-shelf) |
| MXSF-23FD Freezer      | 27 x 33.3 x 83.5<br>686 x 846 x 2121 mm    | 19.3 Cu Ft<br>547 L  | -10° to 10° F<br>-23° to -12° C | 1     | 280 lb<br>127 kg | 3<br>(2 adjustable,<br>1 fixed<br>half-shelf) |
| MXSR-49FD Refrigerator | 54.1 x 33.3 x 83.5<br>1374 x 846 x 2121 mm | 42.9 Cu Ft<br>1215 L | 34° to 40°F<br>2° to 5°C        | 2     | 440 lb<br>200 kg | 6<br>(5 adjustable,<br>1 fixed<br>half-shelf) |
| MXSF-49FD Freezer      | 54.1 x 33.3 x 83.5<br>1374 x 846 x 2121 mm | 42.9 Cu Ft<br>1215 L | -10° to 10° F<br>-23° to -12° C | 2     | 470 lb<br>213 kg | 6<br>(5 adjustable,<br>1 fixed<br>half-shelf) |
| MXSR-23GD Refrigerator | 27 x 33.3 x 83.5<br>686 x 846 x 2121 mm    | 19.3 Cu Ft<br>547 L  | 34° to 40°F<br>2° to 5°C        | 1     | 280 lb<br>127 kg | 3<br>(2 adjustable,<br>1 fixed<br>half-shelf) |
| MXSR-49GD Refrigerator | 54.1 x 33.3 x 83.5<br>1374 x 846 x 2121 mm | 42.9 Cu Ft<br>1215 L | 34° to 40°F<br>2° to 5°C        | 2     | 440 lb<br>200 kg | 6<br>(5 adjustable,<br>1 fixed<br>half-shelf) |

## GLASS DOOR MERCHANDISERS



# MAXX COLD

## X-series

Maxx Cold X-Series Merchandisers are designed for durability and visual appeal to increase the visibility of your product to promote sales and enhance profits. Featuring a bottom mounted compressor, the glass door merchandisers effectively keep product at exactly the right temperature while utilizing energy efficiency. The simple to use but precise digital controls allow for accurate and flexible use of the unit. For energy savings, durability, and visually appealing construction, Maxx Cold X-Series Merchandisers are sure to be a hit.

- Coated Steel Exterior and coated aluminum interior
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- HCFC & CFC-free refrigerant and foam
- Self-closing door
- Magnetic gasket
- Triple pane glass on freezer, double pane on refrigerators
- Powder coated cold rolled steel walls and cabinet, stainless steel floor
- Interior LED lighting
- Includes leveling feet with rollers
- (1.125'w x 1.625'h/ 28.05 x 41.3mm)
- Available in 120V/60Hz/1, (MXM2-48F & MXM3-72F 230V/60Hz/1)
- \* Energy Star listed



DOE 2017  
Compliant

# MAXX COLD

## X-series

## ECONOMY REACH-IN REFRIGERATION

- 23 Cu Ft (nominal), 18.5 Cu Ft (actual storage volume)
- White painted steel exterior and painted aluminum interior is rugged and an excellent value
- Digital controller for easy operation
- Single door with heavy-duty recessed handle
- Casters: 2.5" diameter swivel, 3.5" with plate
- Door locks standard
- Bottom-mounted compressor
- Door-frame heaters standard
- Doors are reversible
- Removeable snap-in gaskets removable for cleaning or replacement
- Available in 115V/60Hz
- \* Energy Star listed



Maxx Cold's 23 cubic foot, one-door reach-in refrigerator and freezer has 4 shelves (3 adjustable, 1 fixed half-shelf), digital temperature control, and automatic defrost. The digital temperature display is easily viewed from the exterior or the cabinet. Maxx Cold refrigerators and freezers are designed to meet the requirements of the most discriminating customer.



MXX-23R\*



MXX-23F

| Model                    | Dim (W"xD"xH")                        | Nominal Capacity  | Temp                            | Doors | Weight           | Shelves                                       |
|--------------------------|---------------------------------------|-------------------|---------------------------------|-------|------------------|---|
| MXX-23R*<br>Refrigerator | 30.6 x 29 x 78<br>777 x 737 x 1981 mm | 23 Cu Ft<br>651 L | 28° to 46°F<br>-2° to 8°C       | 1     | 231 lb<br>105 kg | 4<br>(3 adjustable,<br>1 fixed<br>half-shelf) |
| MXX-23F<br>Freezer       | 30.6 x 29 x 78<br>777 x 737 x 1981 mm | 23 Cu Ft<br>651 L | -10° to 10° F<br>-23° to -12° C | 1     | 249 lb<br>113 kg | 4<br>(3 adjustable,<br>1 fixed<br>half-shelf) |



## BEVERAGE BLASTER



# MAXX COLD

Due to its proprietary cooling process the Maxx Cold Beverage Blaster Sub-Freezing Merchandiser conditions any prepackaged drink in a super-cooled liquid state - up to 14°F below their established freezing temperature - allowing soft drinks, juice, beer or other beverages to be instantaneously turned to an icy slush with just a tap. Serve the coldest, most refreshing drinks with the Beverage Blaster!



BLASTER380



- Interior LED lighting
- Holds pre-packaged bottled or canned beverages as liquid, as low as 14°F (significantly colder than their established freezing point)
- Tight temperature regulation which is ideal for sensitive contents
- Accommodates plastic and glass bottles, foil pouches, juice boxes as well as cans
- Air curtain blocking system to minimize the impact of warm infiltration air on its contents
- Forced-air cooling system (gentle but even air movement) properly cools and conditions its stored liquid to a super-cooled state
- Interior temperature is not affected by outside conditions
- Glass door for easy product viewing
- Bottom mounted oversized compressor
- Three perforated heavy-duty shelves
- Three fixed position air delivery shelves deliver the coldest possible liquid drinks



c



us

| Model      | Dim (W"xD"xH")                               | Nominal Capacity  | Temp                       | Doors | Weight             | Shelves |
|------------|--|-------------------|----------------------------|-------|--------------------|---------|
| BLASTER380 | 25.5 x 24.125 x 76.75<br>648 x 613 x 1950 mm | 10 Cu Ft<br>280 L | 14° to 24°F<br>-9° to -4°C | 1     | 342 lb<br>155.5 kg | 3       |

# MAXX COLD X-series

## COUNTERTOP MERCHANDISERS

- White painted steel exterior and ABS interior
- Easy to clean and low maintenance
- LED lighted interiors brightly illuminate the interior
- Hinged glass doors with door lock standard
- Fully adjustable feet for convenience
- Refrigerators feature manual defrost and freezers feature automatic defrost
- Exterior digital temperature display can be recessed in top of unit or raised for easy viewing
- Feature multi pane glass doors
- Available in 115V/60Hz



Maxx Cold X-Series Merchandisers are designed for durability and visual appeal to increase the visibility of your product to promote sales and enhance profits. Featuring a bottom mounted compressor, the glass door merchandisers effectively keep product at exactly the right temperature while utilizing energy efficiency. For energy savings, durability, and visually appealing construction, Maxx Cold X-Series Merchandisers are sure to be a hit.



MXM1-2F



MXM1-2.5F



MXM1-3.5F



MXM1-4F



MXM1-2R



MXM1-2.5R



MXM1-3.5R



MXM1-4R

| Model                  | Dim (W"D"xH")                            | Nominal Capacity    | Temp                        | Doors | Weight            | Shelves |
|------------------------|--|---------------------|-----------------------------|-------|-------------------|---------|
| MXM1-2R Refrigerator   | 22.3 x 21 x 20.9<br>570 x 533 x 530 mm   | 2.1 Cu Ft<br>59.5 L | 35° to 41°F<br>1.7° to 5°C  | 1     | 94.8 lb<br>43 kg  | 2       |
| MXM1-2F Freezer        | 22.3 x 21 x 20.9<br>570 x 533 x 530 mm   | 2.1 Cu Ft<br>59.5 L | -5° to 5°F<br>-20° to -12°C | 1     | 101.4 lb<br>46 kg | 2       |
| MXM1-2.5R Refrigerator | 22.3 x 21.7 x 28.7<br>570 x 550 x 730 mm | 2.6 Cu Ft<br>73.5 L | 35° to 41°F<br>1.7° to 5°C  | 1     | 106.3 lb<br>48 kg | 2       |
| MXM1-2.5F Freezer      | 22.3 x 21.7 x 28.7<br>570 x 550 x 730 mm | 2.6 Cu Ft<br>73.5 L | -5° to 5°F<br>-20° to -12°C | 1     | 115 lb<br>52 kg   | 2       |
| MXM1-3.5R Refrigerator | 24.3 x 21.4 x 27.2<br>620 x 543 x 691 mm | 3.5 Cu Ft<br>102 L  | 35° to 41°F<br>1.7° to 5°C  | 1     | 117 lb<br>53 kg   | 3       |
| MXM1-3.5F Freezer      | 24.3 x 21.4 x 27.2<br>620 x 543 x 691 mm | 3.5 Cu Ft<br>102 L  | -5° to 5°F<br>-20° to -12°C | 1     | 123.5 lb<br>56 kg | 3       |
| MXM1-4R Refrigerator   | 24.3 x 22 x 35<br>620 x 560 x 890 mm     | 4.2 Cu Ft<br>119 L  | 35° to 41°F<br>1.7° to 5°C  | 1     | 129 lb<br>59 kg   | 3       |
| MXM1-4F Freezer        | 24.3 x 22 x 35<br>620 x 560 x 890 mm     | 4.2 Cu Ft<br>119 L  | -5° to 5°F<br>-20° to -12°C | 1     | 143 lb<br>65 kg   | 3       |

## MERCHANDISERS



# MAXX COLD

## X-series

4-Sided countertop clear glass door merchandisers are designed for durability and visual appeal in promoting impulse sales of your product. These glass door merchandisers are energy efficient and effective at keeping product at exactly the right temperature. This keeps food fresh & delicious for longer time periods. The simple-to-use but precise digital controls allows for accurate temperature settings and regulation.



MECR-31D



MECR-32D

- Dual pane tempered glass doors and sides, enhance energy efficiency by preventing heat loss and minimizing condensation
- Interior LED lighting
- Internal hidden bottom mounted compressor with flow through ventilation to cool the utility compartment
- Manual defrost cycle maintains ideal storage conditions.
- Internal condensate evaporate pan included. No drain connection is needed.
- Comes with all needed approvals for commercial retailers.
- Flat top accommodates POP or other marketing support concepts
- 3 heavy-duty, adjustable chrome-plated wire shelves are provided
- Use of R-290 as the system refrigerant delivers energy savings and presents no environmental risks as it's Global Warming Potential value of 3 is unsurpassed by any other current commercial alternatives
- Unit conforms to 2017 DOE requirements



DOE 2017  
Compliant

| Model                 | Dim (W"xD"xH")                           | Capacity           | Temp                       | Doors                     | Weight             | Shelves      |
|-----------------------|--|--------------------|----------------------------|---------------------------|--------------------|--------------|
| MECR-31D Refrigerator | 16.7 x 15.9 x 38.6<br>425 X 404 X 980 mm | 2.89 Cu Ft<br>82 L | 34° to 54°F<br>-1° to 12°C | 1                         | 79.4 lb<br>36 kg   | 3 adjustable |
| MECR-32D Refrigerator | 16.9 X 16.7 X 38.6<br>429 x 425 x 980 mm | 3.03 Cu Ft<br>86 L | 34° to 54°F<br>-1° to 12°C | 2<br>door pass<br>through | 80.5 lb<br>36.5 kg | 3 adjustable |



# MAXX COLD *X-series*

## FRONT-BREATHING UNDERCOUNTER REFRIGERATOR

- Easy to grip recessed door handle
- 3" casters are standard
- Adjustable Shelf
- Compact design to fit into your kitchen setup
- Holding temperature: 34° to 40°F (2° to 5°C)
- Utilizes environmentally friendly refrigerant R290a
- Forced-air refrigeration
- Efficient cooling system (two or more fans)
- Automatic defrost system
- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Painted Aluminum
- Urethane insulated walls and door
- Heavy duty epoxy coated shelf
- 115V/60Hz/1Ph



DOE 2018  
Compliant

The Maxx Cold Front-Breathing Undercounter Refrigerator is designed for performance. These undercounter refrigerators make the most of available space and provide excellent service. The stainless steel exterior provides durability and ensures years of reliable service.



| Model                        | Dim (W"xD"xH")                            | Capacity           | Temp                     | Doors | Weight           |
|------------------------------|---|--------------------|--------------------------|-------|------------------|
| MXCR27U-FBHC<br>Refrigerator | 25.2 x 31.5 x 77.6<br>640 x 800 x 1970 mm | 6.5 Cu Ft<br>184 L | 34° to 40°F<br>2° to 5°C | 1     | 243 lb<br>110 kg |

## UNDERCOUNTER REFRIGERATOR/FREEZER



# MAXX COLD

Maxx Cold undercounter refrigerators and freezers make the most of available space and provide reliable service. All stainless steel construction allow these units to be easily cleaned.



MCR27U\*  
MCF27U



MCR48U\*  
MCF48U



MCR72U\*  
MCF72U



MCR60U\*  
MCF60U

- Stainless steel exterior and interior
- CFC-free urethane insulated walls & doors
- Recessed door handles
- Adjustable, heavy duty epoxy coated shelves, one per section/door
- Four or six 5" casters with front brakes are standard (2 locking, 2 non-locking)
- Easily serviced back mounted compressor
- Refrigerants: R134A for refrigerator (MCF27U)  
R404A for freezer models (MCF48U, 60U, 72U)
- Forced-air refrigeration
- Efficient cooling system (two or more fans)
- Single self closing door, stays open past 90 degrees
- Single doors will hold full sized sheet pans
- Automatic defrost system
- Available in 120V/60Hz, 220V/50Hz, 230V/60Hz
- \* Energy Star listed



| Model               | Dim (W"xD"xH")                            | Capacity          | Temp                         | Doors | Weight           |
|---------------------|---|-------------------|------------------------------|-------|------------------|
| MCR27U Refrigerator | 27.5 x 30 x 35.875<br>699 x 762 x 911 mm  | 7 Cu Ft<br>198 L  | 33° to 41°F<br>1° to 5°C     | 1     | 185 lb<br>84 kg  |
| MCF27U Freezer      | 27.5 x 30 x 35.875<br>699 x 762 x 911 mm  | 7 Cu Ft<br>198 L  | -10° to 10°F<br>-23° to 12°C | 1     | 194 lb<br>88 kg  |
| MCR48U Refrigerator | 48.5 x 30 x 35.875<br>1232 x 762 x 911 mm | 13 Cu Ft<br>368 L | 33° to 41°F<br>1° to 5°C     | 2     | 264 lb<br>120 kg |
| MCF48U Freezer      | 48.5 x 30 x 35.875<br>1232 x 762 x 911 mm | 13 Cu Ft<br>368 L | -10° to 10°F<br>-23° to 12°C | 2     | 282 lb<br>128 kg |
| MCR60U Refrigerator | 60.5 x 30 x 35.875<br>1537 x 762 x 911 mm | 16 Cu Ft<br>453 L | 33° to 41°F<br>1° to 5°C     | 2     | 308 lb<br>140 kg |
| MCF60U Freezer      | 60.5 x 30 x 35.875<br>1537 x 762 x 911 mm | 16 Cu Ft<br>453 L | -10° to 10°F<br>-23° to 12°C | 2     | 326 lb<br>148 kg |
| MCR72U Refrigerator | 72.5 x 30 x 35.875<br>1941 x 762 x 911 mm | 20 Cu Ft<br>566 L | 33° to 41°F<br>1° to 5°C     | 3     | 353 lb<br>160 kg |
| MCF72U Freezer      | 72.5 x 30 x 35.875<br>1941 x 762 x 911 mm | 20 Cu Ft<br>566 L | -10° to 10°F<br>-23° to 12°C | 3     | 370 lb<br>168 kg |

# MAXX COLD

## X-series

## UNDERCOUNTER REFRIGERATOR/FREEZER

- Stainless steel exterior and painted aluminum interior
- Urethane insulated walls and doors
- Recessed door handles
- Adjustable, heavy duty epoxy coated shelves, one per section/door
- Four 3" casters with front brakes are standard (2 locking, 2 non-locking)
- Efficient cooling system (two or more fans)
- Automatic defrost system
- Single self closing door, stays open past 90 degrees
- Single doors will hold full sized sheet pans
- Doors can be replaced for drawers, see page 46
- Available in 120V/60Hz
- Backsplash accessory available, see page 46 for correct part numbers

\* Energy Star listed



DOE 2017  
Compliant

Maxx Cold X-Series undercounter refrigerators and freezers make the most of available space and provide excellent service. The stainless steel exterior construction ensures years of long life and maximum durability. Maxx Cold X-Series provides unsurpassed quality at a value price.



MXCR27U\*  
MXCF27U



MXCR48U\*  
MXCF48U



MXCR60U\*  
MXCF60U



MXCR72U  
MXCF72U

| Model                   | Dim (W"xD"xH")                             | Capacity            | Temp                        | Doors | Weight           |
|-------------------------|--|---------------------|-----------------------------|-------|------------------|
| MXCR27U<br>Refrigerator | 27.5 x 30 x 35.5<br>699 x 762 x 902 mm     | 6.5 Cu Ft<br>184 L  | 34° to 40°F<br>2° to 5°C    | 1     | 181 lb<br>82 kg  |
| MXCF27U<br>Freezer      | 27.5 x 30 x 35.5<br>699 x 762 x 902 mm     | 6.5 Cu Ft<br>184 L  | 0° to 10°F<br>-18° to -23°C | 1     | 192 lb<br>87 kg  |
| MXCR48U<br>Refrigerator | 48.3125 x 30 x 35.5<br>1227 x 762 x 902 mm | 12 Cu Ft<br>340 L   | 34° to 40°F<br>2° to 5°C    | 2     | 256 lb<br>116 kg |
| MXCF48U<br>Freezer      | 48.3125 x 30 x 35.5<br>1227 x 762 x 902 mm | 12 Cu Ft<br>340 L   | 0° to 10°F<br>-18° to -23°C | 2     | 278 lb<br>126 kg |
| MXCR60U<br>Refrigerator | 60.375 x 30 x 35.5<br>1533 x 762 x 902 mm  | 15.5 Cu Ft<br>439 L | 34° to 40°F<br>2° to 5°C    | 2     | 305 lb<br>138 kg |
| MXCF60U<br>Freezer      | 60.375 x 30 x 35.5<br>1533 x 762 x 902 mm  | 15.5 Cu Ft<br>439 L | 0° to 10°F<br>-18° to -23°C | 2     | 327 lb<br>148 kg |
| MXCR72U<br>Refrigerator | 72.375 x 30 x 35.5<br>1839 x 762 x 902 mm  | 18 Cu Ft<br>510 L   | 34° to 40°F<br>2° to 5°C    | 3     | 353 lb<br>160 kg |
| MXCF72U<br>Freezer      | 72.375 x 30 x 35.5<br>1839 x 762 x 902 mm  | 18 Cu Ft<br>510 L   | 0° to 10°F<br>-18° to -23°C | 3     | 359 lb<br>163 kg |



# UNDERCOUNTER REFRIGERATOR/ FREEZER WITH DRAWERS



# MAXX COLD

## X-series

Maxx Cold X-Series undercounter freezers make the most of available space and provide excellent service. The stainless steel exterior construction ensures years of long life and maximum durability. Maxx Cold X-Series provides unsurpassed quality at a value price.



MXCR27U-D



MXCR48U-DR



MXCR48U-DL



MXCR48U-DLR



MXCR60U-DL



MXCR60U-DR



MXCR60U-DLR

- Stainless Steel Exterior and painted aluminum Interior
- Urethane insulated walls and doors
- Recessed Door Handles
- Adjustable, heavy duty epoxy coated shelves, one per section/door
- Four 3" casters with front brakes are standard (2 locking, 2 non-locking)
- Utilizes environmentally friendly refrigerants using R134A for refrigerators and R404A for freezers
- Forced-air refrigeration
- Efficient cooling system
- Automatic defrost system
- Backsplash available, see page 46.
- Doors can be replaced for drawers, see page 46.
- Available in 120V/60Hz



DOE 2017  
Compliant



| Model                       | Description                       | Dim (W"xD"xH")                             | Capacity            | Temp                        | Weight           |
|-----------------------------|-----------------------------------|--|---------------------|-----------------------------|------------------|
| MXCR27U-D<br>Refrigerator   | w/2 Drawers                       | 27.5 x 30 x 35.5<br>699 x 762 x 902 mm     | 6.5 Cu Ft<br>184 L  | 34° to 40°F<br>2° to 5°C    | 181 lb<br>82 kg  |
| MXCF27U-D<br>Freezer        |                                   |  |                     | 0° to 10°F<br>-18° to -23°C | 192 lb<br>87 kg  |
| MXCR48U-DL<br>Refrigerator  | w/2 Drawers Left,<br>1 Door Right | 48.3125 x 30 x 35.5<br>1227 x 762 x 902 mm | 12 Cu Ft<br>340 L   | 34° to 40°F<br>2° to 5°C    | 256 lb<br>116 kg |
| MXCF48U-DL<br>Freezer       |                                   |  |                     | 0° to 10°F<br>-18° to -23°C | 278 lb<br>126 kg |
| MXCR48U-DR<br>Refrigerator  | w/2 Drawers Right,<br>1 Door Left | 48.3125 x 30 x 35.5<br>1227 x 762 x 902 mm | 12 Cu Ft<br>340 L   | 34° to 40°F<br>2° to 5°C    | 256 lb<br>116 kg |
| MXCF48U-DR<br>Freezer       |                                   |  |                     | 0° to 10°F<br>-18° to -23°C | 278 lb<br>126 kg |
| MXCR48U-DLR<br>Refrigerator | w/4 Drawers                       | 48.3125 x 30 x 35.5<br>1227 x 762 x 902 mm | 12 Cu Ft<br>340 L   | 34° to 40°F<br>2° to 5°C    | 256 lb<br>116 kg |
| MXCF48U-DLR<br>Freezer      |                                   |  |                     | 0° to 10°F<br>-18° to -23°C | 278 lb<br>126 kg |
| MXCR60U-DR<br>Refrigerator  | w/2 Drawers Right,<br>1 Door Left | 60.375 x 30 x 35.5<br>1533 x 762 x 902 mm  | 15.5 Cu Ft<br>439 L | 34° to 40°F<br>2° to 5°C    | 305 lb<br>138 kg |
| MXCF60U-DR<br>Freezer       |                                   |  |                     | 0° to 10°F<br>-18° to -23°C | 327 lb<br>148 kg |
| MXCR60U-DL<br>Refrigerator  | w/2 Drawers Left,<br>1 Door Right | 60.375 x 30 x 35.5<br>1533 x 762 x 902 mm  | 15.5 Cu Ft<br>439 L | 34° to 40°F<br>2° to 5°C    | 305 lb<br>138 kg |
| MXCF60U-DL<br>Freezer       |                                   |  |                     | 0° to 10°F<br>-18° to -23°C | 327 lb<br>148 kg |
| MXCR60U-DLR<br>Refrigerator | w/4 Drawers                       | 60.375 x 30 x 35.5<br>1533 x 762 x 902 mm  | 15.5 Cu Ft<br>439 L | 34° to 40°F<br>2° to 5°C    | 305 lb<br>138 kg |
| MXCF60U-DLR<br>Freezer      |                                   |  |                     | 0° to 10°F<br>-18° to -23°C | 327 lb<br>148 kg |

# MAXX COLD SELECT SERIES

## UNDERCOUNTER REFRIGERATOR/ FREEZER

- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Easy to clean painted aluminum
- Environmentally friendly, CFC-free urethane foam insulated walls and doors
- Heavy duty epoxy coated shelves for easy access and minimal maintenance without disrupting air flow
- Rear-accessed utility compartment provides space efficiency as well as easier servicing while conserving energy consumption
- Easy to grip, stainless steel, self-closing doors with integrated door handles
- 4 Casters (2 locking, 2 non-locking)
- Adjustable shelves (one per section/door)



DOE 2017  
Compliant

Maxx Cold Select Series Undercounter Freezers and Refrigerators are designed for performance – holding your products at their ideal storage conditions. These undercounter refrigerators and freezers make the most of available space and provide excellent service. The stainless steel exterior provides durability and ensures years of reliable service if properly maintained. The unit's foam insulation and forced air cooling system deliver an outstanding food storage environment.



MXSR29U  
MXSF29U



MXSR48U  
MXSF48U



MXSR60U  
MXSF60U

| Model                   | Dim (W"xD"xH")                          | Capacity            | Temp                        | Doors | Weight           |
|-------------------------|---|---------------------|-----------------------------|-------|------------------|
| MXSR29U<br>Refrigerator | 29 x 30.3 x 38.3<br>735 x 770 x 976 mm  | 6.7 Cu Ft<br>184 L  | 33° to 41°F<br>1° to 5°C    | 1     | 143 lb<br>65 kg  |
| MXSF29U<br>Freezer      | 29 x 30.3 x 38.3<br>735 x 770 x 976 mm  | 6.7 Cu Ft<br>184 L  | 0° to 10°F<br>-18° to -23°C | 1     | 145 lb<br>66 kg  |
| MXSR48U<br>Refrigerator | 48 x 30.3 x 38.3<br>1230 x 770 x 976 mm | 11.1 Cu Ft<br>340 L | 33° to 41°F<br>1° to 5°C    | 2     | 242 lb<br>110 kg |
| MXSF48U<br>Freezer      | 48 x 30.3 x 38.3<br>1230 x 770 x 976 mm | 11.1 Cu Ft<br>340 L | 0° to 10°F<br>-18° to -23°C | 2     | 244 lb<br>111kg  |
| MXSR60U<br>Refrigerator | 61 x 30.3 x 38.3<br>1555 x 770 x 976 mm | 14.1 Cu Ft<br>439 L | 33° to 41°F<br>1° to 5°C    | 2     | 265 lb<br>120 kg |
| MXSF60U<br>Freezer      | 61 x 30.3 x 38.3<br>1555 x 770 x 976 mm | 14.1 Cu Ft<br>439 L | 0° to 10°F<br>-18° to -23°C | 2     | 268 lb<br>122 kg |

## SANDWICH STATIONS



# MAXX COLD

Maxx Cold Sandwich Stations are designed for performance and durability with accessibility to allow for quick and easy preparation of sandwiches, salads and more. A high quality stainless steel exterior and interior allows for easy cleaning and a heavy duty stainless steel insulated hood keeps products cool and fresh.



MCR27S



MCR48S



MCR60S



MCR72S

- Stainless steel interior & exterior
- CFC Free Polyurethane insulated walls and doors
- Standard recessed door handles
- Adjustable, heavy-duty wire shelves, each unit comes with one per section/door
- Four or six 5" casters with front brakes are standard (2 locking, 2 non-locking)
- Stainless steel, stain resistant louver distributes air evenly through the unit
- Uses R134A refrigerant
- Forced-air refrigeration
- Efficient cooling system (two fans)
- Single self closing door, stays open past 90 degrees
- Doors can be replaced for drawers, see page 46
- Available in 115V/60Hz, 220V/50Hz, 220V/60Hz



| Model  | Dim (W"xD"xH")                           | Capacity          | Temp                     | Doors | Weight           | Pans<br>1/6 | Shelves |
|--------|--|-------------------|--------------------------|-------|------------------|-------------|---------|
| MCR27S | 27.5 x 30 x 42.5<br>699 x 762 x 1080 mm  | 7 Cu Ft<br>198 L  | 33° to 41°F<br>1° to 5°C | 1     | 198 lb<br>90 kg  | 8           | 1       |
| MCR48S | 48.5 x 30 x 42.5<br>1232 x 762 x 1080 mm | 13 Cu Ft<br>368 L | 33° to 41°F<br>1° to 5°C | 2     | 284 lb<br>129 kg | 12          | 2       |
| MCR60S | 60.5 x 30 x 42.5<br>1537 x 762 x 1080 mm | 16 Cu Ft<br>453 L | 33° to 41°F<br>1° to 5°C | 2     | 316 lb<br>143 kg | 16          | 2       |
| MCR72S | 72.5 x 30 x 42.5<br>1941 x 762 x 1080 mm | 20 Cu Ft<br>566 L | 33° to 41°F<br>1° to 5°C | 3     | 348 lb<br>158 kg | 18          | 3       |



# MAXX COLD

## X-series

## SANDWICH/SALAD STATIONS

- Stainless steel exterior and coated aluminum interior
- CFC Free Polyurethane insulated walls and doors
- Standard recessed door handles
- Adjustable, heavy-duty wire shelves, each unit comes with one per section/door
- Four casters with front brakes are standard (2 locking, 2 non-locking)
- Uses R134A refrigerant
- Forced-air refrigeration
- Efficient self contained cooling system
- Single self closing door, stays open past 90 degrees
- Single doors will hold full sized sheet pans
- 2 rows of pans
- Doors can be replaced for drawers, see page 46
- Available in 120V/60Hz



Maxx Cold X-Series Sandwich Stations provide the perfect blend of durability and accessibility to allow for quick and easy preparation of sandwiches, salads, and more at a value price. A high quality stainless steel exterior allows for easy cleaning and a heavy duty stainless steel insulated hood keeps products cool and fresh. A digital thermostat with LED display completes an all-around unbeatable product.



MXCR29S



MXCR48S



MXCR72S



MXCR60S

| Model   | Dim (W"xD"xH")                             | Capacity            | Temp                     | Doors | Weight           | Pans 1/6 | Shelves |
|---------|--|---------------------|--------------------------|-------|------------------|----------|---------|
| MXCR29S | 28.9 x 29.9 x 43.2<br>735 x 760 x 1098 mm  | 7 Cu Ft<br>198 L    | 33° to 41°F<br>1° to 5°C | 1     | 276 lb<br>125 kg | 8        | 1       |
| MXCR48S | 48.2 x 29.9 x 43.2<br>1225 x 760 x 1098 mm | 12 Cu Ft<br>340 L   | 33° to 41°F<br>1° to 5°C | 2     | 313 lb<br>142 kg | 12       | 2       |
| MXCR60S | 61.2 x 29.9 x 43.2<br>1555 x 760 x 1098 mm | 15.5 Cu Ft<br>439 L | 33° to 41°F<br>1° to 5°C | 2     | 362 lb<br>164 kg | 16       | 2       |
| MXCR72S | 71.7 x 29.9 x 43.2<br>1822 x 760 x 1098 mm | 18 Cu Ft<br>510 L   | 33° to 41°F<br>1° to 5°C | 3     | 381 lb<br>173 kg | 18       | 2       |



## SANDWICH/SALAD STATIONS



# MAXX COLD

## SELECT SERIES

Maxx Cold Select Series Sandwich Stations provide the perfect blend of durability and accessibility to allow for quicker and easier preparation of sandwiches, salads and more at a value price. Hinged food covers keep the food well contents fresh and cool throughout the day. A high quality stainless steel exterior allows for easy cleaning. If properly maintained, this appliance will provide years of reliable, cost effective performance.



MXSR29S

- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Easy to clean painted aluminum
- Environmentally friendly, CFC-free urethane foam insulated walls and doors
- Dart style magnetic compression gaskets are replaceable without requiring tools
- Heavy duty epoxy coated shelves for easy access and minimal maintenance without disrupting air flow
- Open well is designed to hold 1/3, 1/2 or Full Size pans without requiring adapters
- Open well includes slots for industry standard adapter bars to allow use of 1/6 pans



DOE 2017  
Compliant



MXSR48S



MXSR60S

| Model                | Dim (W"xD"xH")                             | Capacity            | Temp                     | Doors | Weight           |
|----------------------|--|---------------------|--------------------------|-------|------------------|
| MXSR29S Refrigerator | 29 x 30.3 x 45.4<br>735 x 770 x 1152 mm    | 7.59 Cu Ft<br>215 L | 33° to 41°F<br>1° to 5°C | 1     | 150 lb<br>68 kg  |
| MXSR48S Refrigerator | 48.4 x 30.3 x 45.4<br>1230 x 770 x 1152 mm | 13.77 Cu<br>390 L   | 33° to 41°F<br>1° to 5°C | 2     | 256 lb<br>116 kg |
| MXSR60S Refrigerator | 61.2 x 30.3 x 45.4<br>1555 x 770 x 1152 mm | 17.83 Cu<br>505 L   | 33° to 41°F<br>1° to 5°C | 2     | 298 lb<br>135 kg |

# MAXX COLD

## X-series

## SANDWICH UNITS WITH DRAWERS

- Stainless steel exterior and coated aluminum interior
- CFC Free Polyurethane insulated walls and doors
- Standard recessed door handles
- Adjustable, heavy-duty wire shelves, each unit comes with one per section/door
- Four casters with front brakes are standard (2 locking, 2 non-locking)
- Uses R134A refrigerant
- Forced-air refrigeration
- Efficient self contained cooling system
- 2 rows of pans
- Doors can be replaced for drawers, see page 46
- Available in 120V/60Hz



Maxx Cold X-Series Sandwich Stations provide the perfect blend of durability and accessibility to allow for quick and easy preparation of sandwiches, salads, and more at a value price. A high quality stainless steel exterior allows for easy cleaning and a heavy duty stainless steel insulated hood keeps products cool and fresh.



MXCR29S-D



MXCR48S-DR



MXCR60S-DLR

| Model       | Description                    | Dim (W"xD"xH")                             | Capacity            | Temp                     | Weight           | Pans (1/6) |
|-------------|--------------------------------|--|---------------------|--------------------------|------------------|------------|
| MXCR29S-D   | w/2 Drawers                    | 28.9 x 29.9 x 43.2<br>735 x 760 x 1098 mm  | 7 Cu Ft<br>198 L    | 33° to 41°F<br>1° to 5°C | 276 lb<br>125 kg | 8          |
| MXCR48S-DR  | w/2 Drawers Right, 1 Door Left | 48.2 x 29.9 x 43.2<br>1225 x 760 x 1098 mm | 12 Cu Ft<br>340 L   | 33° to 41°F<br>1° to 5°C | 313 lb<br>142 kg | 12         |
| MXCR48S-DL  | w/2 Drawers Left, 1 Door Right |  |                     |                          |                  |            |
| MXCR48S-DLR | w/4 Drawers                    |  |                     |                          |                  |            |
| MXCR60S-DR  | w/2 Drawers Right, 1 Door Left | 61.2 x 29.9 x 43.2<br>1555 x 760 x 1098 mm | 15.5 Cu Ft<br>439 L | 33° to 41°F<br>1° to 5°C | 362 lb<br>164 kg | 16         |
| MXCR60S-DL  | w/2 Drawers Left, 1 Door Left  |  |                     |                          |                  |            |
| MXCR60S-DLR | w/4 Drawers                    |  |                     |                          |                  |            |

## MEGATOP PREP UNITS



# MAXX COLD

Maxx Cold Megatops offer additional pan space for increased capacity and flexibility. A complete stainless steel interior and exterior ensures durability and years of reliable service.



MCR27M



MCR48M



MCR60M



MCR72M

- Stainless steel interior & exterior
- CFC Free Polyurethane insulated walls and doors
- Standard recessed door handles
- Adjustable, heavy-duty wire shelves, each unit comes with one per section/door
- Four or six 5" casters with front brakes are standard (2 locking, 2 non-locking)
- Stainless steel, stain resistant louver distributes air evenly through the unit
- Uses R134A refrigerant
- Forced-air refrigeration
- Efficient cooling system (two fans)
- Single door units are field reversible
- Single self closing door, stays open past 90 degrees
- Single doors will hold full sized sheet pans
- Doors can be replaced for drawers, see page 46
- Available in 120V/60Hz, 220V/50Hz, 220V/60Hz



| Model  | Dim (W"xD"xH")                             | Capacity          | Temp                     | Weight           | Doors | Pans 1/6 |
|--------|--|-------------------|--------------------------|------------------|-------|----------|
| MCR27M | 27.5 x 35.3 x 44.1<br>699 x 897 x 1120 mm  | 7 Cu Ft<br>198 L  | 33° to 41°F<br>1° to 5°C | 223 lb<br>101 kg | 1     | 12       |
| MCR48M | 48.3 x 35.3 x 44.1<br>1227 x 897 x 1120 mm | 13 Cu Ft<br>368 L | 33° to 41°F<br>1° to 5°C | 318 lb<br>144 kg | 2     | 18       |
| MCR60M | 60.4 x 35.3 x 44.1<br>1533 x 897 x 1120 mm | 16 Cu Ft<br>453 L | 33° to 41°F<br>1° to 5°C | 362 lb<br>164 kg | 2     | 24       |
| MCR72M | 72.4 x 35.3 x 44.1<br>1839 x 897 x 1120 mm | 20 Cu Ft<br>566 L | 33° to 41°F<br>1° to 5°C | 400 lb<br>182 kg | 3     | 30       |



# MAXX COLD

## X-series

## MEGATOP PREP UNITS

- Stainless steel exterior and coated aluminum interior
- CFC Free Polyurethane insulated walls and doors
- Standard recessed door handles
- Adjustable, heavy-duty wire shelves, each unit comes with one per section/door
- Four casters with front brakes are standard (2 locking, 2 non-locking)
- Uses R134A refrigerant
- Forced-air refrigeration
- Efficient self contained cooling system
- Single door units are field reversible
- Single self closing door, stays open past 90 degrees
- Doors can be replaced for drawers, see page 46
- Available in 120V/60Hz



MXCR29M



MXCR48M



MXCR60M



MXCR72M

| Model   | Dim (W"xD"xH")                             | Capacity            | Temp                     | Doors | Weight           | Pans<br>1/6 |
|---------|--|---------------------|--------------------------|-------|------------------|-------------|
| MXCR29M | 28.9 x 34.5 x 43.2<br>735 x 877 x 1098 mm  | 7 Cu Ft<br>198 L    | 33° to 41°F<br>1° to 5°C | 1     | 276 lb<br>125 kg | 12          |
| MXCR48M | 48.2 x 34.5 x 43.2<br>1225 x 877 x 1098 mm | 12 Cu Ft<br>340 L   | 33° to 41°F<br>1° to 5°C | 2     | 313 lb<br>142 kg | 18          |
| MXCR60M | 61.2 x 34.5 x 43.2<br>1555 x 877 x 1098 mm | 15.5 Cu Ft<br>439 L | 33° to 41°F<br>1° to 5°C | 2     | 362 lb<br>164 kg | 24          |
| MXCR72M | 71.7 x 34.5 x 43.2<br>1822 x 877 x 1098 mm | 18 Cu Ft<br>510 L   | 33° to 41°F<br>1° to 5°C | 3     | 408 lb<br>185 kg | 27          |



## PIZZA PREPARATION



# MAXX COLD

## X-series

Maxx Cold X-Series Pizza Preparation Tables provide users with a reliable and efficient way to quickly prepare pizzas and are available at an unbeatable value. A stainless steel exterior ensures durability and years of reliable service.



MXCPP50

- Stainless steel exterior and coated aluminum interior
- CFC Free Polyurethane insulated walls and doors
- Standard recessed door handles
- Adjustable, heavy-duty wire shelves, each unit comes with one per section/door
- Four casters (2 locking, 2 non-locking)
- Uses R134A refrigerant
- Forced-air refrigeration
- Efficient cooling system
- Self-contained
- Doors can be replaced for drawers, see page 46
- Available in 120V/60Hz



MXCPP70



MXCPP92

| Model   | Dim (W"xD"xH")                           | Capacity          | Temp                     | Doors | Weight           | Pans 1/6 |
|---------|--|-------------------|--------------------------|-------|------------------|----------|
| MXCPP50 | 47.4 x 33 x 41.7<br>1212 x 838 x 1059 mm | 12 Cu Ft<br>340 L | 33° to 41°F<br>1° to 5°C | 1     | 348 lb<br>158 kg | 6        |
| MXCPP70 | 70.8 x 33 x 41.7<br>1798 x 838 x 1059 mm | 22 Cu Ft<br>623 L | 33° to 41°F<br>1° to 5°C | 2     | 432 lb<br>196 kg | 9        |
| MXCPP92 | 94.2 x 33 x 41.7<br>2393 x 838 x 1059 mm | 32 Cu Ft<br>906 L | 33° to 41°F<br>1° to 5°C | 3     | 582 lb<br>264 kg | 12       |

# MAXX COLD

## X-series

## PIZZA PREPARATION WITH DRAWERS

- Stainless steel exterior and coated aluminum interior
- CFC Free Polyurethane insulated walls and doors
- Standard recessed door handles
- Adjustable, heavy-duty wire shelves, each unit comes with one per section/door
- Four casters (2 locking, 2 non-locking)
- Uses R134A refrigerant
- Forced-air refrigeration
- Efficient cooling system
- Self-contained
- Doors can be replaced for drawers, see page 46
- Available in 120V/60Hz



Maxx Cold X-Series Pizza Preparation Tables provide users with a reliable and efficient way to quickly prepare pizzas and are available at an unbeatable value. A stainless steel exterior ensures durability and years of reliable service.



MXCPP50-D



MXCPP70-DR



MXCPP70-DL



MXCPP70-DLR



MXCPP92-DR



MXCPP92-DL



MXCPP92-DLR



MXCPP92-DML



MXCPP92-DM



MXCPP92-DMR



MXCPP92-DML

| Model        | Description   | Dim (W"xD"xH")                           | Capacity          | Temp                     | Weight           | Pans 1/6 |
|--------------|---|--|-------------------|--------------------------|------------------|----------|
| MXCPP50-D    | w/2 Drawers   | 47.4 x 33 x 41.7<br>1212 x 838 x 1059 mm | 12 Cu Ft<br>340 L | 33° to 41°F<br>1° to 5°C | 348 lb<br>158 kg | 6        |
| MXCPP70-DR   | w/2 Drawers Right, 1 Door Left                      | 70.8 x 33 x 41.7<br>1798 x 838 x 1059 mm | 22 Cu Ft<br>623 L | 33° to 41°F<br>1° to 5°C | 432 lb<br>196 kg | 9        |
| MXCPP70-DL   | w/2 Drawers Left, 1 Door Right                      |  |                   |                          |                  |          |
| MXCPP70-DLR  | w/4 Drawers   |  |                   |                          |                  |          |
| MXCPP92-DR   | w/2 Drawers Right,<br>1 Door Center, 1 Door Left    | 94.2 x 33 x 41.7<br>2393 x 838 x 1059 mm | 32 Cu Ft<br>906 L | 33° to 41°F<br>1° to 5°C | 582 lb<br>264 kg | 12       |
| MXCPP92-DL   | w/2 Drawers Left,<br>1 Door Center, 1 Door Right    |  |                   |                          |                  |          |
| MXCPP92-DLR  | w/2 Drawers Left,<br>1 Door Center, 2 Drawers Right |  |                   |                          |                  |          |
| MXCPP92-DM   | w/2 Drawers Center,<br>1 Door Left, 1 Door Right    |  |                   |                          |                  |          |
| MXCPP92-DMR  | w/4 Drawers Right,<br>1 Door Left                   |  |                   |                          |                  |          |
| MXCPP92-DML  | w/4 Drawers Left,<br>1 Door Right                   |  |                   |                          |                  |          |
| MXCPP92-DMLR | w/6 Drawers   |  |                   |                          |                  |          |

## PIZZA PREPARATION TABLES



# MAXX COLD

## SELECT-SERIES

Maxx Cold Select Series Pizza Preparation Tables provide users with a reliable and efficient way to quickly prepare pizzas and provide an unbeatable value. The hinged closable food covers keep the food well contents fresh and cool during off-peak hours. A stainless steel exterior ensures durability and years of reliable service, while the unit's foam insulation and forced air cooling system deliver an outstanding food storage environment.



MXSPP50

- Exterior Material: Durable, easy to clean stainless steel
- Interior Material: Coated aluminum
- Environmentally friendly, CFC-free urethane foam insulated walls and doors
- Standard recessed door handles
- Heavy duty epoxy coated shelves for easy access and minimal maintenance without disrupting air flow
- Front-accessed utility compartment for easy maintenance & effective air movement to properly cool the condensing unit
- Easily replaceable dart-style magnetic compression gaskets



DOE 2017  
Compliant



MXSPP70



MXSPP92

| Model   | Dim (W"xD"xH")                         | Capacity             | Temp                     | Doors | Weight           | Pans<br>1/6 |
|---------|--|----------------------|--------------------------|-------|------------------|-------------|
| MXSPP50 | 47 x 34.6 x 42<br>1200 x 880 x 1068 mm | 10.95 Cu Ft<br>310 L | 33° to 41°F<br>1° to 5°C | 1     | 201 lb<br>91 kg  | 6 (12)      |
| MXSPP70 | 71 x 34.6 x 42<br>1795 x 880 x 1068 mm | 20.91 Cu Ft<br>592 L | 33° to 41°F<br>1° to 5°C | 2     | 342 lb<br>155 kg | 9 (18)      |
| MXSPP92 | 94 x 34.6 x 42<br>2390 x 880 x 1068 mm | 30.87 Cu Ft<br>874 L | 33° to 41°F<br>1° to 5°C | 3     | 485 lb<br>220 kg | 12 (24)     |

# MAXX COLD

## X-series

## WORKTOP REFRIGERATORS/FREEZERS

- Exterior: Stainless steel exterior  
Interior: Painted Aluminum
- Urethane insulated walls and doors
- Recessed door handles
- Four or six 3" casters standard
- Adjustable shelves
- Utilizes environmentally friendly refrigerants using R134A for refrigerators, R404A for freezers
- Forced-air refrigeration
- Efficient cooling system
- Automatic defrost system
- Available in 115V/60Hz/1



DOE 2017  
Compliant



MXCR27WT  
MXCF27WT



MXCR48WT  
MXCF48WT



MXCR60WT  
MXCF60WT



MXCR72WT  
MXCF72WT

| MODEL    | Dim (W"xD"xH")                          | Capacity            | Temp                        | Weight             | Doors |
|----------|---|---------------------|-----------------------------|--------------------|-------|
| MXCR27WT | 27.8 x 29.9 x 39<br>706 x 763 x 991 mm  | 6.5 Cu Ft<br>184 L  | 34° to 40°F<br>2° to 5°C    | 185 lb<br>84 kg    | 1     |
| MXCF27WT | 27.8 x 29.9 x 39<br>706 x 763 x 991 mm  | 6.5 Cu Ft<br>184 L  | 0° to 10°F<br>-18° to -23°C | 194 lb<br>88 kg    | 1     |
| MXCR48WT | 48.2 x 29.9 x 39<br>1224 x 763 x 991 mm | 12 Cu Ft<br>340 L   | 34° to 40°F<br>2° to 5°C    | 266.7 lb<br>121 kg | 2     |
| MXCF48WT | 48.2 x 29.9 x 39<br>1224 x 763 x 991 mm | 12 Cu Ft<br>340 L   | 0° to 10°F<br>-18° to -23°C | 288.8 lb<br>131 kg | 2     |
| MXCR60WT | 61.2 x 29.9 x 39<br>1554 x 763 x 991 mm | 15.5 Cu Ft<br>439 L | 34° to 40°F<br>2° to 5°C    | 319.6 lb<br>145 kg | 2     |
| MXCF60WT | 61.2 x 29.9 x 39<br>1554 x 763 x 991 mm | 15.5 Cu Ft<br>439 L | 0° to 10°F<br>-18° to -23°C | 341.7 lb<br>155 kg | 2     |
| MXCR72WT | 71.7 x 29.9 x 39<br>1821 x 763 x 991 mm | 18 Cu Ft<br>510 L   | 34° to 40°F<br>2° to 5°C    | 374.7 lb<br>170 kg | 3     |



## CHEF BASES



# MAXX COLD

Maxx Cold Chef Bases are designed for performance and durability while providing ample space for storage. Stainless steel exterior and interior construction ensures years of reliable service.



MCCB54



MCCB72

- Urethane insulated walls and doors
- Recessed drawer handles
- Four or six 5" casters standard (four or six)
- Utilizes environmentally friendly refrigerants using R134A for refrigerators
- Forced-air refrigeration
- Efficient cooling system
- Self-contained
- Automatic defrost system
- Available in 120V/60Hz, 220V/50Hz, 220V/60Hz



| Model  | Dim (W"xD"xH")                          | Capacity          | Temp                     | Weight           | Pans (Full Size) |
|--------|---|-------------------|--------------------------|------------------|------------------|
| MCCB54 | 52.8 x 30.5 x 25<br>1340 x 775 x 637 mm | 10 Cu Ft<br>278 L | 33° to 41°F<br>1° to 5°C | 252 lb<br>114 kg | 6                |
| MCCB72 | 63.2 x 30.5 x 25<br>1575 x 775 x 637 mm | 14 Cu Ft<br>396 L | 33° to 41°F<br>1° to 5°C | 324 lb<br>147 kg | 8                |

## CHEF BASES



# MAXX COLD

### X-series

- Recessed drawer handles
- Four 5" casters standard
- Utilizes environmentally friendly refrigerants using R134A for refrigerators
- Forced-air refrigeration
- Efficient cooling system
- Self-contained
- Automatic defrost system
- Available in 115V/60Hz



DOE 2017  
Compliant

Maxx Cold X-Series Chef Bases are designed for performance and durability while providing ample space for storage. Stainless steel exterior and urethane insulated walls and doors construction ensures years of reliable service.



MXCB48



MXCB60



MXCB72

| Model  | Dim (W"xD"xH")                        | Capacity              | Temp                     | Weight           | Drawers |
|--------|---------------------------------------|-----------------------|--------------------------|------------------|---------|
| MXCB48 | 50 x 31.9 x 26<br>1270 x 810 x 660 mm | 6.5 Cu Ft<br>184 L    | 33° to 41°F<br>1° to 5°C | 234 lb<br>106 kg | 2       |
| MXCB60 | 62 x 31.9 x 26<br>1576 x 810 x 660 mm | 8.8 Cu Ft<br>249 L    | 33° to 41°F<br>1° to 5°C | 269 lb<br>122 kg | 2       |
| MXCB72 | 74 x 31.9 x 26<br>1880 x 810 x 660 mm | 11.1 Cu Ft<br>314.3 L | 33° to 41°F<br>1° to 5°C | 313 lb<br>142 kg | 4       |

# MAXX COLD

## X-series

## SCHOOL MILK COOLERS

- CFC-free refrigerant and foam insulation
- Condensate evaporator – no drain connection needed
- Electronic thermostat controls for accurate control
- Digital LED temperature display for easy readability
- Cold wall construction keeps temperatures consistent - holds milk between 36° & 38° F
- Magnetic gasket can be replaced without any tools
- Stainless Steel interior and exterior for easy cleaning
- 3 sizes available to hold 8, 12 or 16 (13"x13"x11") milk cases per unit
- Includes set of four (4) 4-inch caster wheels



Maxx Cold School Milk Coolers offer an efficient, low maintenance solution for milk crate storage and cooling. The cold wall construction delivers a consistent temperature range and stainless steel construction makes for a sleek look and easy cleaning.



MXMC34HC



MXMC49HC



MXMC58HC

| Model    | Dim (W"xD"xH")                         | Capacity<br>(13x13x11" Crates) | Capacity<br>(19x13x11" Crates) | Temp                      | Amps | HP  |
|----------|--|--------------------------------|--------------------------------|---------------------------|------|-----|
| MXMC34HC | 34 x 30.6 x 42<br>865 x 777 x 1067 mm  | 8                              | 4                              | 36° to 38°F<br>2° to 3° C | 4    | 1/4 |
| MXMC49HC | 49 x 30.6 x 42<br>1245 x 777 x 1067 mm | 12                             | 8                              | 36° to 38°F<br>2° to 3° C | 7.5  | 1/4 |
| MCMX58HC | 58 x 30.6 x 42<br>1475 x 777 x 1067 mm | 16                             | 10                             | 36° to 38°F<br>2° to 3° C | 7.5  | 1/3 |

## DIPPING CABINETS



# MAXX COLD

## X-series

Ice cream dipping cabinets offer an attractive way to display or serve ice cream product. Perfect for ice cream parlors, sorbet shops, restaurants, and concession stands. These cabinets can hold handdipped ice cream or novelties. The glass top allows customers to easily view your offerings. Heat-reflective glass ensures a consistent temperature, keeping cold desserts at the perfect consistency.



MXDC-4



MXDC-8  
(sink optional)

- Flat, tempered clear glass sliding lids
- Lid lock and keys with removable pin to keep lid unlocked
- Interior LED lights makes it easier to see selection and enhance product's appearance
- Curved tempered glass sneeze guard (assembly req.)
- Molded plastic lid frame heated to prevent frost or ice build-up
- Internal condensate evaporator pan. No need for a floor drain.
- Bottom defrost drain with plug
- Heavy-duty casters, two locking
- Removable rubber bumper guards, side grill
- Adjustable temperature range -18°F to +10°F (-28°C to -12°C)
- Thermometer display: external, digital, easily read
- Exterior Material: durable, white powder coated steel
- Interior Material: pre-coated white steel
- Tubholders: powder coated, wire
- Insulation: Thick, 2.5" foamed in-place, environmentally friendly, polyurethane
- Includes: Hanging tub holder and skirts



DOE 2017  
Compliant



MXDC-12

| Model   | Dim (W"xD"xH")                             | Gross Capacity      | Temp                         | # of Tub Holders<br># of Skirts | Tubs Exposed<br>for Scooping | Tubs<br>Storage | Compressor<br>HP | Weight           |
|---------|--|---------------------|------------------------------|---------------------------------|------------------------------|-----------------|------------------|------------------|
| MXDC-4  | 31.5 x 27.2 x 50.4<br>800 x 691 x 1280 mm  | 7.4 Cu Ft<br>210 L  | -18° to 10°F<br>-28° to 12°C | 2 / 2                           | 4                            | 2               | 1/3              | 165 lb<br>74 kg  |
| MXDC-8  | 51.7 x 27.2 x 50.4<br>1313 x 691 x 1280 mm | 13.8 Cu Ft<br>391 L | -18° to 10°F<br>-28° to 12°C | 4 / 4                           | 8                            | 6               | 1/3              | 235 lb<br>107 kg |
| MXDC-12 | 70 x 27.2 x 50.4<br>1778 x 691 x 1280 mm   | 20 Cu Ft<br>566 L   | -18° to 10°F<br>-28° to 12°C | 6 / 6                           | 12                           | 10              | 2/3              | 287 lb<br>130 kg |

# MAXX COLD

## X-series

## MOBILE ICE CREAM FREEZERS

- Flat, tempered clear glass sliding lids
- Lid lock and keys
- Interior LED lights makes it easier to see selection and enhance product's appearance
- Molded plastic lid frame heated to prevent frost or ice build-up
- Internal condensate evaporator pan. No need for a floor drain.
- Bottom defrost drain with plug
- Dual heavy-duty casters, two locking
- Removable rubber bumper guards, side grill
- Adjustable temperature range -18°F to +10°F (-28°C to -12°C)
- Thermometer display: external, analog, easily read
- Exterior Material: durable, white zinc coated, baked on enamel steel
- Interior Material: painted white power coated steel
- Flat wire baskets with 3 compartments
- Insulation: Thick, 2.5" foamed in-place, environmentally friendly, polyurethane
- Includes: Novelty baskets



Mobile Ice Cream Freezers with transparent, flat glass sliding lids offer an attractive way to display or serve ice cream product. Perfect for ice cream parlors, sorbet shops, gelato stations, restaurants, and concession stands. These cabinets can hold hand-dipped ice cream or novelties. The sliding clear glass top allows customers to easily view your offerings.



MXF31F



MXF52F



MXF71F

| Model  | Dim (W"xD"xH")                          | Gross Capacity      | Temp                         | Tubs Exposed for Scooping | Tubs Storage | Amps | Baskets/ Dividers | Compressor HP | Weight          |
|--------|---|---------------------|------------------------------|---------------------------|--------------|------|-------------------|---------------|-----------------|
| MXF31F | 31.5 x 27.2 x 33<br>800 x 691 x 838 mm  | 7.4 Cu Ft<br>210 L  | -18° to 10°F<br>-28° to 12°C | 4                         | 2            | 2.5  | 2 / 2             | 1/3           | 117 lb<br>53kg  |
| MXF52F | 51.7 x 27.2 x 33<br>1313 x 691 x 838 mm | 13.8 Cu Ft<br>391 L | -18° to 10°F<br>-28° to 12°C | 8                         | 6            | 4    | 4 / 2             | 1/3           | 162 lb<br>73 kg |
| MXF71F | 70 x 27 x 33<br>1778 x 691 x 838 mm     | 20 Cu Ft<br>566 L   | -18° to 10°F<br>-28° to 12°C | 12                        | 10           | 6.5  | 5 / 2             | 2/3           | 197 lb<br>89 kg |



## GLASS DISPLAY CHEST FREEZER MERCHANDISERS



# MAXX COLD

**X-series**

This line of Glass Display Freezer Merchandisers offer a spacious interiors that allow you to store ice cream and frozen novelties in an elegant presentation, with size options to meet your specific application requirements. Capacities range from 3.8 to 14.3 cubic feet (108 to 405 liters). Each unit has thick wall insulation and a white powder coated finish for easy cleaning.



MXF32CHC-3

- Clear, curved glass sliding lids
- Easy grip sliding lid handle
- Lid lock and keys
- Interior LED lights makes it easier to see selection and enhance product's appearance
- Molded plastic lid frame heated to prevent frost or ice build-up
- Internal condensate evaporator pan. No need for a floor drain.
- Heavy-duty casters
- Removable rubber bumper guards, side grill
- 115V/60Hz/1



DOE 2017  
Compliant



MXF48CHC-5



MXF72CHC-8

| MODEL      | Dim (W"xD"xH")                            | Capacity             | Refrigerant | Weight             | HP   |
|------------|---|----------------------|-------------|--------------------|------|
| MXF25CHC-2 | 24.6 x 27.6 x 32.6<br>625 c 700 x 828 mm  | 3.81 Cu Ft<br>108 L  | R600a       | 103.6 lb<br>47 kg  | 1/9  |
| MXF32CHC-3 | 31.5 x 27.5 x 33.5<br>800 x 697 x 850 mm  | 4.87 Cu Ft<br>138 L  | R290a       | 114.6 lb<br>52 kg  | 1/7  |
| MXF40CHC-4 | 39.4 x 27.5 x 33.5<br>1000 x 697 x 850 mm | 6.71 Cu Ft<br>190 L  | R290a       | 130.1 lb<br>59 kg  | 1/5  |
| MXF48CHC-5 | 47.4 x 27.5 x 33.5<br>1204 x 697 x 850 mm | 8.62 Cu Ft<br>244 L  | R290a       | 152.1 lb<br>69 kg  | 1/4  |
| MXF54CHC-6 | 53.2 x 27.5 x 33.5<br>1350 x 697 x 850 mm | 9.96 Cu Ft<br>282 L  | R290a       | 165.4 lb<br>75 kg  | 1/4  |
| MXF64CHC-7 | 63.4 x 27.5 x 33.5<br>1610 x 697 x 850 mm | 12.36 Cu Ft<br>350 L | R290a       | 187.4 lb<br>85 kg  | 1/4+ |
| MXF72CHC-8 | 71.7 x 27.5 x 33.5<br>1820 x 697 x 850 mm | 14.30 Cu Ft<br>405 L | R290a       | 231.5 lb<br>105 kg | 1/2  |

# MAXX COLD SELECT SERIES

## SOLID TOP CHEST FREEZERS

- Sturdy hinged top opening lid that opens up to 90°
- Includes lock to provide security even if unattended
- MXSH3.4S, MXSH5.2S, MXSH7.0S Utilizes R-600A refrigerant
- MXSH9.6S, MXSH12.7S, MXSH15.9S Utilizes R-134A refrigerant
- Adjustable feet or caster wheel options available
- MXSH 3.4S, MXSH5.2S, MXSH7.0S, MXSH9.6S, MXSH12.7S (1) White Wire Storage Basket
- MXSH15.9S (2) White Wire Storage Basket
- Can hold the contents safely for 2 days in case of a power outage



Maxx Cold Select Series solid hinged lid chest freezers are an excellent option for safely storing frozen food products such as meat, packaged foods, ice cream, vegetables, desserts and bags of ice while keeping them at the ideal storage temperature for extended life, maintaining quality and taste, preventing freezer burn and development of ice crystals. The stored product is easily accessible when it's time to use any of the contents. The included interior storage basket(s) helps you organize your products, so you can quickly locate and retrieve what you need. The refrigeration system is oversized so this unit can be used safely in a garage even if the temperature drops to 0°F or rises above 100°F. The hinged lid includes a lock and key to prevent unauthorized access to the contents.



MXSH3.4S



MXSH5.2S



MXSH7.0S



MXSH9.6S



MXSH12.7S



MXSH15.9S

| MODEL     | Dim (W"xD"xH")                              | Capacity            | Temp                          | Weight          | Doors |
|-----------|---|---------------------|-------------------------------|-----------------|-------|
| MXSH3.4S  | 22.8 x 22 x 33.625<br>579 x 559 x 854 mm    | 3.4 Cu Ft<br>96 L   | 0° to 11° F<br>-24° to -18° C | 67 lb<br>30 kg  | 1     |
| MXSH5.2S  | 30.4 x 22 x 33.625<br>772 x 559 x 854 mm    | 5.2 Cu Ft<br>147 L  | 0° to 11° F<br>-24° to -18° C | 78 lb<br>35 kg  | 1     |
| MXSH7.0S  | 37.8 x 22 x 33.625<br>960 x 559 x 854 mm    | 7.0 Cu Ft<br>198 L  | 0° to 11° F<br>-24° to -18° C | 88 lb<br>40 kg  | 1     |
| MXSH9.6S  | 40.6 x 29.7 x 33.625<br>1030 x 755 x 854 mm | 9.6 Cu Ft<br>272 L  | 0° to 11° F<br>-24° to -18° C | 119 lb<br>54 kg | 1     |
| MXSH12.7S | 50 x 29.7 x 33.625<br>1270 x 755 x 854 mm   | 12.7 Cu Ft<br>360 L | 0° to 11° F<br>-24° to -18° C | 132 lb<br>60 kg | 1     |
| MXSH15.9S | 60.2 x 29.7 x 33.625<br>1530 x 755 x 854 mm | 15.9 Cu Ft<br>450 L | 0° to 11° F<br>-24° to -18° C | 165 lb<br>75 kg | 1     |

## SOLID TOP CHEST FREEZERS



# MAXX COLD

## SELECT SERIES

Maxx Cold Select Series solid hinged lid chest freezers are an excellent option for safely storing frozen food products such as meat, packaged foods, ice cream, vegetables, desserts and bags of ice while keeping them at the ideal storage temperature for extended life, maintaining quality and taste, preventing freezer burn and development of ice crystals. The stored product is easily accessible when it's time to use any of the contents. The included interior storage basket(s) helps you organize your products, so you can quickly locate and retrieve what you need. The refrigeration system is oversized so this unit can be used safely in a garage even if the temperature drops to 0°F or rises above 100°F. The hinged lid includes a lock and key to prevent unauthorized access to the contents. The freezer is sized to pull down its contents temperature level if loaded with pre-chilled products (recommended loading temperature for all products is ≤ 41°F/5°C). The freezer design will provide years of reliable operation if properly maintained.

- Sturdy hinged top opening lid that opens up to 90° makes access and servicing the freezer easy
- Double locking lids on MXSH23.6S and MXSH30.0S
- Includes lock(s) to provide security even if unattended
- Utilizes CFC & HFC free R-134A refrigerant
- Adjustable feet or caster wheel options available
- Two (2) white wire storage baskets included for easy product organization
- Can hold the contents safely for 2 days in case of a power outage



MXSH19.4S



MXSH23.6S



MXSH30.0S

| MODEL     | Dim (W"xD"xH")                               | Capacity            | Temp                          | Weight          | Doors |
|-----------|--|---------------------|-------------------------------|-----------------|-------|
| MXSH19.4S | 71.3 x 29.7 x 33.625<br>1810 x 755 x 854 mm  | 19.4 Cu Ft<br>549 L | 0° to 11° F<br>-24° to -18° C | 181 lb<br>82 kg | 1     |
| MXSH23.6S | 78.75 x 29.7 x 33.625<br>2000 x 755 x 854 mm | 23.6 Cu Ft<br>669 L | 0° to 11° F<br>-24° to -18° C | 176 lb<br>80 kg | 2     |
| MXSH30.0S | 76 x 35.25 x 35.83<br>1930 x 895 x 910 mm    | 30 Cu Ft<br>850 L   | 0° to 11° F<br>-24° to -18° C | 209 lb<br>95 kg | 2     |

- Urethane insulated walls and doors
- Recessed drawer handles
- Holding temperature ranges from 0°F to 10°F
- Front facing drainage for easier collection of water
- Locking Lids
- Chest freezer panelling is made of:
  - External: White Painted
  - Internal: Aluminum
- Baskets (3 sizes):
  - 7.9"W x 16"D x 6.7"H
  - 13"W x 19.3"D x 10.9"H
  - 7.9"W x 19.3"D x 10.9"H
- Available in 115V/60Hz

### CURVED GLASS DISPLAY FREEZERS:

- 5" casters standard
- Utilizes CFC & HCFC FREE refrigerants using R134A for refrigerators
- Forced-air refrigeration
- Efficient cooling system
- Self-contained

### FLAT GLASS DISPLAY FREEZERS:

- 75 mm Insulation
- Exterior temperature display.
- Casters:
  - MXH7.1F and MXH10.6F (2) Front Caster / (2) Back Feet.
  - MXH14.2F includes 4 casters.



DOE 2017  
Compliant

### CURVED GLASS DISPLAY FREEZERS:

Display ice cream, popsicles, and other frozen novelties. The elegant curved glass sliding doors enable perfect merchandise presentation!

### FLAT GLASS DISPLAY FREEZERS:

Convenient angled lid frame allows for maximum product visibility, with a reduction in solar heat gain and minimal condensation. The spacious interior in each commercial chest freezer allows you to stock bulk items like meat, packaged foods, ice cream, and bags of ice.



MXH7.1C  
Curved Glass



MXH10.6C  
Curved Glass



MXH10.6F  
Flat Glass



MXH14.2C  
Curved Glass



MXH14.2F  
Flat Glass

| Model                | Dim (W"xD"xH")                              | Capacity            | Temp                        | Weight            | # Of Baskets   |
|----------------------|---|---------------------|-----------------------------|-------------------|--|
| MXH10.6C<br>MXH10.6F | 47.05 x 25.6 x 36.89<br>953 x 589 x 937 mm  | 9.7 Cu Ft<br>275 L  | 0° - 10°F<br>-17.7° - -23°C | 132.2 lb<br>60 kg | 3 baskets<br>13"W x 19.3"D x 10.9"H  |
| MXH14.2C<br>MXH14.2F | 54.92 x 25.6 x 36.89<br>1397 x 589 x 937 mm | 11.8 Cu Ft<br>334 L | 0° - 10°F<br>-17.7° - -23°C | 147.7 lb<br>67 kg | 3 baskets<br>13"W x 19.3"D x 10.9"H<br>1 basket<br>7.9"W x 19.3"D x 10.9"H |



## BOTTLE COOLERS



# MAXX COLD

## X-series

Bottle Coolers are an excellent option for keeping bottled beverages cold and accessible. The spacious heavy duty, durable stainless steel interior houses a LED light to illuminate the inside, which is especially convenient in dark operating environments. A built-in bottle opener and bottle cap catcher make this unit fully functional for high volume operations. It's structure incorporates a reinforced heavy duty crossbar allowing it to withstand the harshest of conditions. Its durable black exterior blends in with almost every bar or similar commercial application.



MXCR50B

- Reinforced heavy-duty crossbar can support heavy loads without breaking
- External built-in bottle opener and bottle cap catcher
- Sliding top lid makes access and service easy
  - MXCR50B / MXCR65B Two (2) sliding lids
  - MXCR96B Three (3) sliding lids
- Rounded (coved) internal edges for easy cleaning
- LED lighting: Bright, long lasting and energy efficient
- Forced air cooling for high efficiency, rapid product cooling and reliable, consistent temperature control
- Uses an environmentally friendly, high r-value, efficient foam insulation to provide years of reliable, cost effective operation
- Comes on sturdy 1" rollers



MXCR96B



MXCR65B

| Model   | Dim (W"xD"xH")                        | Capacity          | Temp                     | Doors/<br>Dividers |
|---------|---------------------------------------|-------------------|--------------------------|--------------------|
| MXCR50B | 49.4 x 27 x 35<br>1255 x 686 x 889 mm | 14 Cu Ft<br>396 L | 34° to 41°F<br>1° to 5°C | 2 / 2              |
| MXCR65B | 64.3 x 27 x 35<br>1633 x 686 x 889 mm | 17 Cu Ft<br>481 L | 34° to 41°F<br>1° to 5°C | 2 / 2              |
| MXCR96B | 95.3 x 27 x 35<br>2296 x 686 x 889 mm | 26 Cu Ft<br>736 L | 34° to 41°F<br>1° to 5°C | 3 / 3              |



# MAXX COLD

## KEG COOLERS

- Painted black coated steel exterior.
- Galvanized steel interior.
- Stainless steel interior floor.
- Stainless steel top.
- 3" wide polished stainless steel draft tower dispenser. (SOLD SEPARATELY)
- Slide out condensing unit for easy cleaning and servicing.
- Epoxy coated evaporator coils resist corrosion.
- Four 5" Casters Standard
- Adjustable heavy duty wire shevles (2 per section/door)
- Available in 115V/60HZ, 220V/50Hz



Maxx Cold's keg coolers feature a sanitary stainless steel top and black coated steel exterior for durability and easy cleaning. Forced air cooling distributes air evenly to keep contents of the cabinet cooled at the optimum temperature. These fit the standard 3" wide polished stainless steel draft tower dispensers, that are sold separately. They attach to the top center of the stainless steel counter and cooled by continuous cold air circulation through the channel air distributor system. This reduces foam when dispensing beer. Refrigeration temperature ranges from 34° to 41° F (1° to 5° C).

MCBD24-1B



MCBD70-2B



| Model     | Dim (W"xD"xH")                             | Capacity          | Temp                     | Doors   | Weight           |
|-----------|--|-------------------|--------------------------|---------|------------------|
| MCBD24-1B | 23.4 x 31.2 x 54.9<br>595 x 792 x 1395 mm  | 7 Cu Ft<br>198 L  | 33° to 41°F<br>1° to 5°C | 1 Solid | 187 lb<br>85 kg  |
| MCBD70-2B | 69.1 x 27.1 x 52.8<br>1755 x 688 x 1340 mm | 23 Cu Ft<br>651 L | 33° to 41°F<br>1° to 5°C | 2 Solid | 298 lb<br>135 kg |



## MAXX COLD KEG COOLERS TOWER OPTIONS



D4743SDT

D4743STT

PT8SS

PT10SS

Pass Thru Towers have pedestal tubes spaced appropriately to fit existing holes.

### MCBD24-1B : One Tower 24" Direct Draw Beer Dispenser

#### OPTIONAL TOWERS

D4743SDT, 2-Faucet Cylinder  
D4743STT, 3-Faucet Cylinder  
TT3CR, 3-Faucet "T"  
TT4CR, 4-Faucet "T"

#### ACCOMMODATES

(1) Half Barrel Keg  
(1) Quarter Barrel Short Keg  
Plus (2) Sixth Barrel Kegs  
(2) Quarter Barrel Slim Kegs  
(4) Sixth Barrel Kegs

### MCBD60-2B : Two Tower 60" Direct Draw Beer Dispenser

#### OPTIONAL TOWERS

(QTY 2) D4743SDT, 2-Faucet Cylinder (4 faucets total)  
(QTY 2) D4743STT, 3-Faucet Cylinder (6 faucets total)  
(QTY 1) PT8SS, 8-Faucet Pass Thru (8 faucets total)

#### ACCOMMODATES

(2) Half Barrel Kegs  
Plus (1) Quarter Barrel Slim Keg  
(2) Quarter Barrel Short Kegs  
Plus (1) Quarter Barrel Slim Keg  
(6) Quarter Barrel Slim Kegs  
(8) Sixth Barrel Kegs

### MCBD70-2B : Two Tower 70" Direct Draw Beer Dispenser

#### OPTIONAL TOWERS

(QTY 2) D4743SDT, 2-Faucet Cylinder (4 faucets total)  
(QTY 2) D4743STT, 3-Faucet Cylinder (4 faucets total)  
(QTY 1) PT8SS, 8-Faucet Pass Thru (8 faucets total)  
(QTY 1) PT10SS, 10-Faucet Pass Thru (10 faucets total)

#### ACCOMMODATES

(3) Half Barrel (15.5 Gallons) Keg  
(3) Quarter Barrel Short (7.75 Gallons) Keg  
(10) Quarter Barrel Slim (7.75 Gallons) Keg  
(12) Sixth Barrel (5.23 Gallons) Keg

### MCBD90-3B : Two Tower 90" Direct Draw Beer Dispenser

#### OPTIONAL TOWERS

(QTY 2) D4743SDT, 2-Faucet Cylinder (4 faucets total)  
(QTY 2) D4743STT, 3-Faucet Cylinder (4 faucets total)  
(QTY 1) PT8SS, 8-Faucet Pass Thru (8 faucets total)  
(QTY 1) PT10SS, 10-Faucet Pass Thru (10 faucets total)

#### ACCOMMODATES

(4) Half Barrel (15.5 Gallons) Keg  
(4) Quarter Barrel Short (7.75 Gallons) Keg  
(10) Quarter Barrel Slim (7.75 Gallons) Keg  
(16) Sixth Barrel (5.23 Gallons) Keg

# MAXX COLD

## X-series

## KEG COOLERS WITH SINGLE/DOUBLE TOWER

- White powder coated steel interior
- Stainless steel interior floor plate included to prevent damage or denting
- Stainless steel top
- CFC-free Polyurethane 2"/50mm insulated walls and doors
- Slide out condensing unit for easy cleaning and servicing
- Epoxy coated evaporator coils to resist corrosion
- Operation requires CO2 tank and regulator (not included)
- Easy to grip recessed drawer handles
- Adjustable heavy duty wire shelves (2 per section/door)
- 3" (77mm) diameter stainless steel insulated beer tower
- Insulated door(s) with lock and key set
- 4" Castor Set Is Included (shorter casters are an available option)



Maxx Cold's keg coolers with direct draw beer towers feature a sanitary stainless steel top and black coated steel exterior for durability and easy cleaning. Forced air cooling distributes air evenly to keep contents of the cabinet cooled at the optimum temperature. Standard 3" polished stainless steel draft tower dispensers are attached to the top center of the stainless steel counter and cooled by continuous cold air circulation through the channel air distributor system. This reduces foam when dispensing beer. Refrigeration temperature ranges from 34° to 41° F (1° to 5° C).



MXBD24-1B



MXBD48-1B



MXBD60-1B



MXBD48-2B



MXBD60-2B



MXBD72-2B

| MODEL     | Dim (W"xD"xH")                               | Capacity            | Temp                     | Weight           | Doors |
|-----------|--|---------------------|--------------------------|------------------|-------|
| MXBD24-1B | 23.3 x 29.9 x 51.65<br>592 x 760 x 1312 mm   | 7.2 Cu Ft<br>204 L  | 34° to 41°F<br>1° to 5°C | 161 lb<br>73 kg  | 1     |
| MXBD48-1B | 47.5 x 24.4 x 50.98<br>1205 x 620 x 1295 mm  | 10.5 Cu Ft<br>297 L | 34° to 41°F<br>1° to 5°C | 264 lb<br>120 kg | 1     |
| MXBD60-1B | 61.06 x 24.4 x 50.98<br>1247 x 620 x 1295 mm | 14.2 Cu Ft<br>402 L | 34° to 41°F<br>1° to 5°C | 302 lb<br>137 kg | 1     |
| MXBD48-2B | 47.5 x 24.4 x 50.98<br>1205 x 620 x 1295 mm  | 10.5 Cu Ft<br>297 L | 34° to 41°F<br>1° to 5°C | 267 lb<br>121 kg | 2     |
| MXBD60-2B | 61.06 x 24.4 x 50.98<br>1551 x 620 x 1295    | 14.2 Cu Ft<br>402 L | 34° to 41°F<br>1° to 5°C | 304 lb<br>138 kg | 2     |
| MXBD72-2B | 73.07 x 24.4 x 50.98<br>1856 x 620 x 1295 mm | 17.3 Cu Ft<br>490 L | 34° to 41°F<br>1° to 5°C | 351 lb<br>159 kg | 2     |



## KEG COOLERS WITH SINGLE/DOUBLE TOWER



# MAXX COLD

**X-series**

Maxx Cold's keg coolers with direct draw beer towers feature a sanitary stainless steel top and black coated steel exterior for durability and easy cleaning. Forced air cooling distributes air evenly to keep contents of the cabinet cooled at the optimum temperature. Standard 3" polished stainless steel draft tower dispensers are attached to the top center of the stainless steel counter and cooled by continuous cold air circulation through the channel air distributor system. This reduces foam when dispensing beer. Refrigeration temperature ranges from 34° to 41° F (1° to 5° C).



MXBD24-1S



MXBD48-1S



MXBD60-1S



MXBD48-2S



MXBD60-2S



MXBD72-2S

- Stainless steel exterior
- White powder coated steel interior
- Stainless steel interior floor plate included to prevent damage or denting
- Stainless steel top
- CFC-free Polyurethane 2"/50mm insulated walls and doors
- Slide out condensing unit for easy cleaning and servicing
- Epoxy coated evaporator coils to resist corrosion
- Operation requires CO2 tank and regulator (not included)
- Easy to grip recessed drawer handles
- Adjustable heavy duty wire shelves (2 per section/door)
- 3" (77mm) diameter stainless steel insulated beer tower
- Insulated door(s) with lock and key set
- 4" Caster Set Is Included (shorter casters are an available option)



DOE 2017  
Compliant

| MODEL     | Dim (W"xD"xH")                               | Capacity            | Temp                     | Weight           | Doors |
|-----------|--|---------------------|--------------------------|------------------|-------|
| MXBD24-1S | 23.3 x 29.9 x 51.65<br>592 x 760 x 1312 mm   | 7.2 Cu Ft<br>204 L  | 34° to 41°F<br>1° to 5°C | 161 lb<br>73 kg  | 1     |
| MXBD48-1S | 47.5 x 24.4 x 50.98<br>1205 x 620 x 1295 mm  | 10.5 Cu Ft<br>297 L | 34° to 41°F<br>1° to 5°C | 264 lb<br>120 kg | 1     |
| MXBD60-1S | 61.06 x 24.4 x 50.98<br>1247 x 620 x 1295 mm | 14.2 Cu Ft<br>402 L | 34° to 41°F<br>1° to 5°C | 302 lb<br>137 kg | 1     |
| MXBD48-2S | 47.5 x 24.4 x 50.98<br>1205 x 620 x 1295 mm  | 10.5 Cu Ft<br>297 L | 34° to 41°F<br>1° to 5°C | 267 lb<br>121 kg | 2     |
| MXBD60-2S | 61.06 x 24.4 x 50.98<br>1551 x 620 x 1295 mm | 14.2 Cu Ft<br>402 L | 34° to 41°F<br>1° to 5°C | 304 lb<br>138 kg | 2     |
| MXBD72-2S | 73.07 x 24.4 x 50.98<br>1856 x 620 x 1295 mm | 17.3 Cu Ft<br>490 L | 34° to 41°F<br>1° to 5°C | 351 lb<br>159 kg | 2     |

# MAXX COLD

## BACK BAR COOLERS

- Painted black coated steel exterior
- Galvanized steel interior
- Stainless steel interior floor
- Stainless steel top
- Slide out condensing unit for easy cleaning and servicing
- Epoxy coated evaporator coils resist corrosion
- Standard 4" casters
- Adjustable heavy duty wire shelves (2 per section/door)
- Available in 115V/60HZ, 220V/50HZ, 230V60Hz
- MCBB-- models: Solid doors with locks.
- MCBB--BG models: Glass doors without locks.



Maxx Cold's Back Bar Coolers with stainless steel top are designed to keep cold beverages at the optimum temperature for serving customers. The entire cabinet is foamed in place with low ODP polyurethane insulation. The galvanized steel interior with stainless steel floors and a wall thickness of 1.5" guarantees years of cold refrigeration. The self-contained, slide out unit uses R-134A refrigerant and comes equipped with coated evaporator coils and a condensate evaporator. Temperature ranges from 33°F to 41°F (1°C to 5°C).



MCBB24-1B



MCBB60-2BG



MCBB70-2B



MCBB70-2BG



MCBB90-3B

| Model      | Dim (W"xD"xH")                           | Capacity            | Temp                     | Doors   | Weight           |
|------------|--|---------------------|--------------------------|---------|------------------|
| MCBB24-1B  | 23.4 x 31.2 x 39.2<br>595 x 792 x 995 mm | 7 Cu Ft<br>198 L    | 33° to 41°F<br>1° to 5°C | 1 Solid | 187 lb<br>85 kg  |
| MCBB60-2BG | 59.1 x 27.1 x 37<br>1500 x 688 x 940 mm  | 19 Cu Ft<br>538 L   | 33° to 41°F<br>1° to 5°C | 2 Glass | 298 lb<br>135 kg |
| MCBB70-2B  | 69.1 x 27.1 x 37<br>1755 x 688 x 940 mm  | 23 Cu Ft<br>651 L   | 33° to 41°F<br>1° to 5°C | 2 Solid | 298 lb<br>135 kg |
| MCBB70-2BG | 69.1 x 27.1 x 37<br>1755 x 688 x 940 mm  | 23 Cu Ft<br>651 L   | 33° to 41°F<br>1° to 5°C | 2 Glass | 320 lb<br>145 kg |
| MCBB90-3B  | 90.4 x 27.1 x 37<br>2295 x 688 x 940 mm  | 31.5 Cu Ft<br>892 L | 33° to 41°F<br>1° to 5°C | 3 Solid | 441 lb<br>200 kg |

## BACK BAR COOLERS



# MAXX COLD

## X-series

Back Bar Coolers are an excellent option for keeping bottled or canned beverages cold and accessible. The spacious stainless steel interior houses a LED light to illuminate the inside, which is especially convenient in dark operating environments. Units are built to perform in either built-in, stationary, or mobile applications. Multi-pane glass doors display the product for impulse purchases and make the appliance energy efficient. The nominal 27.6" depth (702mm) fits in almost any commercial application and holds your beer-beverages at an ideal serving temperature.



MXBB60



MXBB60G



MXBB70



MXBB70G



MXBB90



MXBB90G

- Door locks
- Reinforced lip and door threshold protector helps to minimize damage to the cabinet from routine cabinet loading and unloading.
- LED lighting: Bright, long lasting and energy efficient
- Solid State Controls. Easy-to-adjust. Easy to monitor. Deliver consistent performance.
- Foamed in place urethane insulation
- Can be built-in to your back or front counter, free standing on leveling legs or mobile on casters.
- 5" casters (front 2 lock in place).  
Can be mobile (on casters) or stationary leveling legs.
- Includes internal condensate evaporator  
No drain hook-ups are needed.



Intertek

Intertek

| Model   | Dim (W"xD"xH")                             | Capacity            | Temp                 | Doors   | Weight           |
|---------|--|---------------------|----------------------|---------|------------------|
| MXBB60  | 58.7 x 27.6 x 42.5<br>1492 x 702 x 1080 mm | 13.8 Cu Ft<br>390 L | 33°- 41°F<br>1°- 5°C | 2 Solid | 276 lb<br>125 kg |
| MXBB60G | 58.7 x 27.6 x 42.5<br>1492 x 702 x 1080 mm | 13.8 Cu Ft<br>390 L | 33°- 41°F<br>1°- 5°C | 2 Glass | 290 lb<br>132 kg |
| MXBB70  | 69.2 x 27.6 x 42.5<br>1753 x 702 x 1080 mm | 14.5 Cu Ft<br>410 L | 33°- 41°F<br>1°- 5°C | 2 Solid | 300 lb<br>136 kg |
| MXBB70G | 69.2 x 27.6 x 42.5<br>1753 x 702 x 1080 mm | 14.5 Cu Ft<br>410 L | 33°- 41°F<br>1°- 5°C | 2 Glass | 339 lb<br>154 kg |
| MXBB90  | 90.4 x 27.6 x 42.5<br>2296 x 702 x 1080 mm | 25.3 Cu Ft<br>716 L | 33°- 41°F<br>1°- 5°C | 3 Solid | 346 lb<br>157 kg |
| MXBB90G | 90.4 x 27.6 x 42.5<br>2296 x 702 x 1080 mm | 25.3 Cu Ft<br>716 L | 33°- 41°F<br>1°- 5°C | 3 Glass | 396 lb<br>180 kg |





## COMPACT INDOOR/OUTDOOR REFRIGERATION

Designed to fulfill your outdoor entertainment area needs and dreams. Perfect for any entertainment space, these units can be freestanding or built-in and are designed to weather the elements when necessary while providing years of enjoyment with easy maintenance.



MCR3U  
Indoor Refrigerator



MCR3U-O  
Outdoor Refrigerator  
Stainless Steel Exterior



MCR5U-O  
Outdoor Refrigerator  
Stainless Steel Exterior

### MCR3U/MC3U-O

- Designed for household and commercial use
- Air-cooled condenser
- Stainless steel doors

### MCR5U-O

- Indoor/Outdoor
- Brushed Stainless Steel exterior and handle
- Interior is ABS



| Model   | Dim (W"xD"xH")                           | Capacity         | Temp                       | Weight           | Shelves |
|---------|--|------------------|----------------------------|------------------|---------|
| MCR3U   | 14.5 x 23 x 33.5<br>368 x 584 x 851 mm   | 3 cu ft<br>85 L  | 35° to 41°F<br>1° to 5°C   | 77 lb<br>35 kg   | 3       |
| MCR3U-O | 14.5 x 23 x 33.5<br>368 x 584 x 851 mm   | 3 cu ft<br>85 L  | 35° to 41°F<br>1° to 5°C   | 67 lb<br>30 kg   | 3       |
| MCR5U-O | 23.625 x 23 x 33.5<br>600 x 584 x 851 mm | 5 cu ft<br>142 L | 35° to 41° F<br>1° to 5° C | 93 lb<br>42.5 kg | 3       |

## WINE CELLARS & BEVERAGE CENTERS



MCWC28  
Outdoor Wine Cellar  
Black Painted Steel



MCWC28-O  
Outdoor Wine Cellar  
Stainless Steel Exterior



MCBC3U  
Indoor Beverage Center  
Black Painted Steel



MCBC3U-O  
Outdoor Beverage Center  
Stainless Steel Exterior

- Designed for household and commercial use
- Air-cooled condenser
- LED Lighting
- Electronic control panel with LCD display on door



| Model    | Dim (W"xD"xH")                         | Capacity        | Temp                     | Weight         | Shelves |
|----------|--|-----------------|--------------------------|----------------|---------|
| MCWC28   | 14.5 x 23 x 33.5<br>368 x 584 x 851 mm | 3 cu ft<br>85 L | 35° to 40°F<br>1° to 5°C | 76 lb<br>34 kg | 6       |
| MCWC28-O | 14.5 x 23 x 33.5<br>368 x 584 x 851 mm | 3 cu ft<br>85 L | 35° to 40°F<br>1° to 5°C | 76 lb<br>34 kg | 6       |
| MCBC3U   | 14.5 x 23 x 33.5<br>368 x 584 x 851 mm | 3 cu ft<br>85 L | 35° to 40°F<br>1° to 5°C | 77 lb<br>35 kg | 4       |
| MCBC3U-O | 14.5 x 23 x 33.5<br>368 x 584 x 851 mm | 3 cu ft<br>85 L | 35° to 40°F<br>1° to 5°C | 67 lb<br>30 kg | 4       |



## ICE MAKERS/SELF-CONTAINED



MIM25



MIM25-O

MIM25 (Indoor) Stainless steel door, black cabinet  
MIM25-O (Outdoor) Stainless steel door and cabinet  
25 lb Ice Maker – Self Contained

- Up to 22 lb (10.8 kg) daily output capability\*\*
- Air-cooled condenser
- Automatic overflow prevention
- For freestanding or built-in applications
- UL-listed for commercial use
- Storage capacity: 12 lb (5.4 kg)
- Available in 120V/60Hz and 220V/50Hz



| Model   | Dim (W"xD"xH")                           | Ice Type | Capacity                    | Ice Size (W"xD"xH")                 | Weight         | Water Consumption**<br>(gal/100 lb ice) |
|---------|--|----------|-----------------------------|-------------------------------------|----------------|---|
| MIM25   | 14.6 x 17.9 x 24.5<br>370 x 454 x 622 mm | Crescent | 14.5 lb / 6.6 kg<br>PER DAY | 2.5 x .5 x 1<br>63.5 x 13 x 25.4 mm | 60 lb<br>27 kg | 12.1<br>46 L                            |
| MIM25-O | 14.6 x 17.9 x 24.5<br>370 x 454 x 622 mm | Crescent | 12.8 lb / 5.8 kg<br>PER DAY | 2.5 x .5 x 1<br>63.5 x 13 x 25.4 mm | 60 lb<br>27 kg | 12.1<br>46 L                            |



MIM50V\*



MIM50\*



MIM50-O\*



MIM50P\*



MIM50P-O\*

MIM50V (Indoor) Black door, black cabinet  
MIM50 (Indoor) Stainless steel door, black cabinet  
MIM50-O (Indoor/Outdoor) Stainless steel door and cabinet  
MIM50P (Premium Indoor) Stainless steel door, black cabinet  
50 lb Ice Maker – Self Contained

- Up to 65 lb (23 kg) daily output capability\*\*
- Air-cooled compressor
- For freestanding or built-in applications
- UL-listed for commercial use
- Storage capacity: 25 lb (11 kg)
- Available in 120V/60Hz and 220V/50Hz

\* Energy Star listed

### MIM50P & MIM50P-O ONLY:

- Comes with drain pump
- Internal LED light
- Metal scoop with inside holder



| Model    | Dim (W"xD"xH")                           | Ice Type  | Capacity                 | Ice Size (W"xD"xH")                    | Weight           | Water Consumption**<br>(gal/100 lb ice) |
|----------|--|-----------|--------------------------|--|------------------|---|
| MIM50    | 14.6 x 23.4 x 32.6<br>370 x 593 x 845 mm | Full Dice | 65 lb / 23 kg<br>PER DAY | .6875 x .875 x .875<br>18 x 22 x 22 mm | 84 lb<br>38 kg   | 13.8<br>52 L                            |
| MIM50-O  | 14.6 x 25 x 34.7<br>370 x 632 x 880 mm   | Full Dice | 65 lb / 23 kg<br>PER DAY | .6875 x .875 x .875<br>18 x 22 x 22 mm | 83 lb<br>37 kg   | 13.8<br>52 L                            |
| MIM50V   | 14.6 x 23.4 x 32.6<br>370 x 593 x 828 mm | Full Dice | 65 lb / 23 kg<br>PER DAY | .6875 x .875 x .875<br>18 x 22 x 22 mm | 84 lb<br>38 kg   | 13.8<br>52 L                            |
| MIM50P   | 14.6 x 23.4 x 32.6<br>370 x 593 x 828 mm | Full Dice | 65 lb / 23 kg<br>PER DAY | .6875 x .875 x .875<br>18 x 22 x 22 mm | 92 lb<br>41.7 kg | 13.8<br>52 L                            |
| MIM50P-O | 14.6 x 23.4 x 32.6<br>370 x 593 x 828 mm | Full Dice | 65 lb / 23 kg<br>PER DAY | .6875 x .875 x .875<br>18 x 22 x 22 mm | 92 lb<br>41.7 kg | 13.8<br>52 L                            |

\*\* Water consumption is based on 90°F ambient air temperature and 70°F incoming water temperature.



## SELF-CONTAINED MARINE ICE MAKERS

- Produces crescent ice cubes in a 12 lb storage bin
- Automatic shut-off when bin is full
- Travel latch keeps closed during at-sea travel
- Door prop allows for air-drying inside of unit when powered off
- Refrigerated storage compartment to inhibit ice melt
- Air-cooled condenser
- Designed for freestanding or built-in applications
- Includes NEMA 5-15 cord set for simple installation
- Ice Scoop is available as an optional accessory



Maxx Ice Compact Marine Ice Makers produce up to 25 pounds of ice per day that fill the provided 12 pound storage bin within a refrigerated compartment to minimize any ice melt related to storing the harvested cubes. The unit produces crescent shaped ice cubes and is available in stainless steel, white or black finishes. Built for marine applications, the MMAR25 is suitable for free-standing or built in installation (comes with a removable flange). Unit installation is easy and no drain connection is necessary.



MMAR25S



MMAR25B



MMAR25W

| Model   | Dim (W"xD"xH")                         | Ice Type | Ice Production             | Ice Size (W"xD"xH")                 | Weight<br>(w/o Flange Kit) | Water Consumption**<br>(gal/25 lb ice) |
|---------|--|----------|----------------------------|-------------------------------------|----------------------------|--|
| MMAR25S | 14 x 17.2 x 24.5<br>356 x 438 x 622 mm | Crescent | 25.1 lb/11.4 kg<br>PER DAY | 0.5 x 0.75 x 2.5<br>12 x 20 x 60 mm | 51 lb<br>23 kg             | 3<br>11.4 L                            |
| MMAR25B | 14 x 17.2 x 24.5<br>356 x 438 x 622 mm | Crescent | 25.1 lb/11.4 kg<br>PER DAY | 0.5 x 0.75 x 2.5<br>12 x 20 x 60 mm | 51 lb<br>23 kg             | 3<br>11.4 L                            |
| MMAR25W | 14 x 17.2 x 24.5<br>356 x 438 x 622 mm | Crescent | 25.1 lb/11.4 kg<br>PER DAY | 0.5 x 0.75 x 2.5<br>12 x 20 x 60 mm | 51 lb<br>23 kg             | 3<br>11.4 L                            |

# DIGITAL UNDERCOUNTER ICE MACHINES



Self contained air cooled ice maker. For freestanding or built in, undercounter applications. Can produce 150 to 328 pounds of ice per day (under the right conditions) depending on the model. Includes a self-contained storage bin. Stainless steel construction provides a durable, reliable ice maker that is low-maintenance and easy to clean. Front breathing design. Vertical evaporator and proven ice making technology delivers years of reliable ice production.

- Exterior Material: Stainless Steel with Black Trim
- Air Cooled Compressor
- Programmable, new user-friendly digital controls.
- Screen displays ice maker status
- Automatic Cleaning Cycle
- Includes Scoop
- Includes 6' (2m) long NEMA 5-15 cord set for simple installation



MIM150N/NH  
MIM200N/NH  
MIM260N/NH



MIM320N/NH

| Model    | Dim (W"xD"xH")                     | Ice Type  | Ice Production             | Storage Capacity | Ice Size (W"xD"xH")                      | Weight            | Water Consumption** (gal/100 lb ice) |
|----------|------------------------------------|-----------|----------------------------|------------------|--|-------------------|--------------------------------------|
| MIM150N  | 24 x 24 x 39<br>610 x 610 x 986 mm | Full Dice | 143 lb / 65 kg<br>PER DAY  | 88 lb<br>40 kg   | 7/8 x 7/8 x 7/8<br>22.2 x 22.2 x 22.2 mm | 155 lb<br>70.5 kg | 13.7 gal<br>51.9 L                   |
| MIM150NH | 24 x 24 x 39<br>610 x 610 x 986 mm | Half Dice | 143 lb / 65 kg<br>PER DAY  | 88 lb<br>40 kg   | 7/8 x 7/8 x 1/2<br>22.2 x 22.2 x 13 mm   | 155 lb<br>70.5 kg | 13.7 gal<br>51.9 L                   |
| MIM200N  | 24 x 24 x 39<br>610 x 610 x 986 mm | Full Dice | 209 lb / 95 kg<br>PER DAY  | 88 lb<br>40 kg   | 7/8 x 7/8 x 7/8<br>22.2 x 22.2 x 22.2 mm | 157 lb<br>71.5 kg | 13.1 gal<br>49.6 L                   |
| MIM200NH | 24 x 24 x 39<br>610 x 610 x 986 mm | Half Dice | 211 lb / 96 kg<br>PER DAY  | 88 lb<br>40 kg   | 7/8 x 7/8 x 1/2<br>22.2 x 22.2 x 13 mm   | 157 lb<br>71.5 kg | 13.1 gal<br>49.6 L                   |
| MIM260N  | 24 x 24 x 39<br>610 x 610 x 986 mm | Full Dice | 270 lb / 122 kg<br>PER DAY | 88 lb<br>40 kg   | 7/8 x 7/8 x 7/8<br>22.2 x 22.2 x 22.2 mm | 160 lb<br>72.5 kg | 12.8 gal<br>48.5 L                   |
| MIM260NH | 24 x 24 x 39<br>610 x 610 x 986 mm | Half Dice | 278 lb / 126 kg<br>PER DAY | 88 lb<br>40 kg   | 7/8 x 7/8 x 1/2<br>22.2 x 22.2 x 13 mm   | 160 lb<br>72.5 kg | 12.8 gal<br>48.5 L                   |
| MIM320N  | 30 x 28 x 29<br>762 x 711 x 986 mm | Full Dice | 346 lb / 157 kg<br>PER DAY | 128 lb<br>58 kg  | 7/8 x 7/8 x 7/8<br>22.2 x 22.2 x 22.2 mm | 165 lb<br>75 kg   | 12.6 gal<br>47.7 L                   |
| MIM320NH | 30 x 28 x 29<br>762 x 711 x 986 mm | Half Dice | 343 lb / 155 kg<br>PER DAY | 128 lb<br>58 kg  | 7/8 x 7/8 x 1/2<br>22.2 x 22.2 x 13 mm   | 165 lb<br>75 kg   | 12.6 gal<br>47.7 L                   |



## ICE MAKERS/SELF-CONTAINED

- Exterior Material: Stainless Steel with Black Trim
- Air Cooled Compressor
- Programmable, solid state, digital electronic control system.
- Built-In Self Cleaning Mode
- Includes Scoop
- Includes Tubing for Supply and Drain Lines (Except MIM250 & MIM265H)
- Includes NEMA 5-15 cord set for simple installation
- Available in 120V/60Hz and 220V/50Hz
- \* Energy Star listed

(Use of a Water Filter is recommended.)



Self contained ice maker. For freestanding or built in, undercounter applications. Includes a self-contained storage bin. Stainless steel construction provides durability to a unit that is low-maintenance and easy to clean. Front breathing design. Vertical evaporator and proven ice making technology assures years of reliable ice production.



MIM75  
MIM80\*  
MIM85H\*



MIM100\*  
MIM120  
MIM125H  
MIM130\*



MIM250  
MIM265H

| Model   | Dim (W"xD"xH")                     | Ice Type  | Ice Production            | Storage Capacity | Ice Size (W"xD"xH")                    | Weight          | Water Consumption** (gal/100 lb ice) |
|---------|------------------------------------|-----------|---------------------------|------------------|--|-----------------|--------------------------------------|
| MIM250  | 24 x 24 x 39<br>610 x 610 x 991 mm | Full Dice | 210 lb / 95 kg<br>PER DAY | 75 lb<br>34 kg   | .6875 x .875 x .875<br>18 x 22 x 22 mm | 144 lb<br>65 kg | 13.3 gal<br>50 L                     |
| MIM265H | 24 x 24 x 39<br>610 x 610 x 991 mm | Half Dice | 210 lb / 95 kg<br>PER DAY | 75 lb<br>34 kg   | .5 x .875 x .875<br>13 x 22 x 22 mm    | 144 lb<br>65 kg | 13.3 gal<br>50 L                     |



## MODULAR ICE MAKERS

 **MAXX ICE**

Modular ice maker. Can produce 450 to 1000 pounds of ice per day (under the right conditions) depending on the model. Stainless steel construction provides durability to a unit that is low-maintenance and easy to clean. Vertical evaporator and proven ice making technology assures years of reliable ice production. These models can be stacked for even more ice production, if needed.



- Exterior Material: Stainless Steel
- Air Cooled Compressor
- Automatic Cleaning Cycle
- Storage Bin is Not Included

MIM1000

1000 lb Ice Maker

- Up to 800 lb (363 kg) daily output capability\*\*

MIM600

600 lb Ice Maker

- Up to 468 lb (212 kg) daily output capability\*\*

MIM452

452 lb Ice Maker

- Up to 368 lb (164 kg) daily output capability\*\*

\* Energy Star listed

(Use of a Water Filter is recommended.)



MIM452  
(Shown with optional bin)

Stacking Kit Available  
Model MISK-KIT



| Model    | Dim (W"xD"xH")                        | Ice Type  | Ice Production            | Ice Size (W"xD"xH")                    | Weight          | Water Consumption**<br>(gal/100 lb ice) |
|----------|---------------------------------------|-----------|---------------------------|--|-----------------|---|
| MIM452   | 30 x 24 x 21<br>762 x 610 x 533 mm    | Full Dice | 368 lb/164 kg<br>PER DAY  | .6875 x .875 x .875<br>18 x 22 x 22 mm | 130 lb<br>59 kg | 16<br>60.6 L                            |
| MIM475H* | 30 x 24 x 21<br>762 x 610 x 533 mm    | Half Dice | 368 lb/164 kg<br>PER DAY  | .5 x .875 x .875<br>13 x 22 x 22 mm    | 148 lb<br>67 kg | 16<br>60.6 L                            |
| MIM600   | 30 x 24 x 21<br>762 x 610 x 533 mm    | Full Dice | 468 lb/212 kg<br>PER DAY  | .6875 x .875 x .875<br>18 x 22 x 22 mm | 155 lb<br>70 kg | 16<br>60.6 L                            |
| MIM615H  | 30 x 24 x 21<br>762 x 610 x 533 mm    | Half Dice | 468 lb/212 kg<br>PER DAY  | .5 x .875 x .875<br>13 x 22 x 22 mm    | 155 lb<br>70 kg | 16<br>60.6 L                            |
| MIM915H  | 30 x 24 x 21<br>762 x 610 x 533 mm    | Half Dice | 800 lb/363 kg<br>PER DAY  | .5 x .875 x .875<br>13 x 22 x 22 mm    | 194 lb<br>88 kg | 16<br>60.6 L                            |
| MIM1000  | 30 x 24 x 26.63<br>762 x 610 x 676 mm | Full Dice | 1000 lb/454 kg<br>PER DAY | .6875 x .875 x .875<br>18 x 22 x 22 mm | 194 lb<br>88 kg | 16<br>60.6 L                            |

\*\* Water consumption is based on 90°F ambient air temperature and 70°F incoming water temperature.



# MAXX ICE

## MODULAR ICE MAKERS

- Exterior Material: Corrosion Resistant Stainless Steel & Plastic
- Air Cooled Compressor
- Automatic Cleaning Cycle
- Hinged panel for easy service
- New user-friendly controls
- Screen displays ice maker status
- Power for unit also illuminates LED light in storage bin (MIB280N)
- For more ice making production, ice makers are stackable. Must purchase optional adapter.
- MIM360N/NH, MIM370N/NH and MIM500N/NH come with NEMA 5-15 cord set for plug-and-play operation.
- \* Energy Star listed



30" wide Maxx Ice modular ice makers will produce 300 to 1000 pounds of ice per day (under the right conditions) depending on the model. Stainless steel exterior construction provides durability to a unit that is low-maintenance and easy to clean. Vertical evaporator and proven ice making technology assures years of reliable ice production. These models can be stacked for even more ice production, if needed. Comes with a hinged front panel for easy servicing. These models can be stacked for even more ice production, if needed.



MIM370N\*

Shown on Bin  
Bin sold Separately



MIM500N\*

NH Models  
Half Dice  
.5 x .875 x .875  
13 x 22 x 22 mm



N Models  
Full Dice  
.6875 x .875 x .875  
18 x 22 x 22 mm



| Model     | Dim (W"xD"xH")                         | Ice Type  | Ice Production<br>(70°F air/<br>water temp 50°F) | Ice Size (W"xD"xH")                    | Weight          | Water Consumption**<br>(gal/100 lb ice) |
|-----------|--|-----------|--|--|-----------------|---|
| MIM360N*  | 22 x 24.6 x 21<br>564 x 625 x 532 mm   | Full Dice | 373 lbs<br>(169kg)                               | .6875 x .875 x .875<br>18 x 22 x 22 mm | 93 lb<br>42 kg  | 13.12 gal<br>49.7 L                     |
| MIM360NH* | 22 x 24.6 x 21<br>564 x 625 x 532 mm   | Half Dice | 361 lbs<br>(164kg)                               | .5 x .875 x .875<br>13 x 22 x 22 mm    | 93 lb<br>42 kg  | 13.12 gal<br>49.7 L                     |
| MIM370N*  | 30 x 24.6 x 21<br>762 x 625 x 532 mm   | Full Dice | 373 lbs<br>(169kg)                               | .6875 x .875 x .875<br>18 x 22 x 22 mm | 93 lb<br>42 kg  | 13.12 gal<br>49.7 L                     |
| MIM370NH* | 30 x 24.6 x 21<br>762 x 625 x 532 mm   | Half Dice | 361 lbs<br>(164kg)                               | .5 x .875 x .875<br>13 x 22 x 22 mm    | 93 lb<br>42 kg  | 13.12 gal<br>49.7 L                     |
| MIM500N*  | 30 x 24.6 x 21<br>762 x 625 x 532 mm   | Full Dice | 521 lbs<br>(236kg)                               | .6875 x .875 x .875<br>18 x 22 x 22 mm | 130 lb<br>59 kg | 13.12 gal<br>49.7 L                     |
| MIM500NH* | 30 x 24.6 x 21<br>762 x 625 x 532 mm   | Half Dice | 513 lbs<br>(233kg)                               | .5 x .875 x .875<br>13 x 22 x 22 mm    | 130 lb<br>59 kg | 13.12 gal<br>49.7 L                     |
| MIM650N   | 30 x 24.6 x 21<br>762 x 625 x 532 mm   | Full Dice | 650 lbs<br>(295kg)                               | .6875 x .875 x .875<br>18 x 22 x 22 mm | 155 lb<br>70 kg | 13.12 gal<br>49.7 L                     |
| MIM650NH  | 30 x 24.6 x 21<br>762 x 625 x 532 mm   | Half Dice | 645 lbs<br>(245kg)                               | .5 x .875 x .875<br>13 x 22 x 22 mm    | 155 lb<br>70 kg | 13.12 gal<br>49.7 L                     |
| MIM1000N  | 30 x 24.6 x 26.7<br>766 x 625 x 679 mm | Full Dice | 937 lbs<br>(425kg)                               | .6875 x .875 x .875<br>18 x 22 x 22 mm | 194 lb<br>88 kg | 13.12 gal<br>49.7 L                     |
| MIM1000NH | 30 x 24.6 x 26.7<br>766 x 625 x 679 mm | Half Dice | 1005 lbs<br>(456kg)                              | .5 x .875 x .875<br>13 x 22 x 22 mm    | 194 lb<br>88 kg | 13.12 gal<br>49.7 L                     |

## HOTEL ICE DISPENSERS

 **MAXX ICE**

Maxx Ice Hotel Ice Dispensers deliver a high capacity storage and easy to use ice dispenser solution. The MID200X will fit any 30" modular ice maker including the entire range of Maxx Ice Modular Ice Makers (available with various ice production capacities to suit your needs.) These dispensers feature easy to use push button operation and a lift wheel agitation/dispensing system to prevent ice clumping.



Shown with modular ice machine\*

- 190 Lbs. (86 Kg) ice storage capacity
- Regular timed agitation keeps ice cubes separated in storage bin
- Push button ice dispensing
- 304 Series stainless steel exterior
- Large sink accommodates most hotel ice buckets
- Urethane foam insulated cabinet
- Large drain pan to collect overflow
- Will dispense various cube sizes
- Available in 115V/60Hz/1 Ph (NEMA 5-15P)  
208-230V/60Hz/1 and 220V/50Hz/1 are available as options

(Use of a water filter is recommended.)

\* Modular ice machine sold separate.



| Model   | Dim (W"xD"xH")                        | Ice Type      | Capacity                  | Operating Temperature Range | Shipping Weight  |
|---------|---------------------------------------|---------------|---------------------------|-----------------------------|------------------|
| MID200X | 30 x 32.3 x 53<br>762 x 820 x 1346 mm | Various Types | 190 lb / 86 kg<br>PER DAY | 45°F – 90°F<br>7°C – 32°C   | 230 lb<br>104 kg |



## ICE BINS

- Exterior: Stainless steel and Interior: Poly liner
- Stainless steel door
- 6" (152 mm) adjustable stainless steel legs
- Easy to clean and maintain
- Non-CFC Free Foamed-in-place insulation
- Ice bins require gravity drains



BIN650



BIN950



| Model  | Dim (W"xD"xH")  | Max Bin Capacity | Weight          |
|--------|---|------------------|-----------------|
| BIN650 | 42 x 35 x 41<br>1067 x 889 x 1041 mm<br>(with 6" legs)    | 660 lb<br>299 kg | 160 lb<br>73 kg |
| BIN950 | 48 x 31.75 x 50<br>1220 x 806 x 1270 mm<br>(with 6" legs) | 950 lb<br>431 kg | 210 lb<br>95 kg |



MIB470N  
(Formerly MIB430N)



MIB310N  
(Formerly MIB280N)



MIB580N

| Model   | Dim (W"xD"xH")  | Max Bin Capacity   | Shipping Weight   |
|---------|---|--------------------|-------------------|
| MIB310N | 22 x 34 x 41.4<br>564 x 864 x 1052 mm<br>(with 6" legs) | 310 lb<br>140.6 kg | 99.5 lb<br>45 kg  |
| MIB400  | 30.25 x 34 x 37<br>768 x 864 x 940 mm<br>(with 6" legs) | 400 lb<br>181 kg   | 112 lb<br>50.8 kg |
| MIB470N | 30 x 34 x 41.4<br>763 x 864 x 1052 mm<br>(with 6" legs) | 470 lb<br>213 kg   | 117 lb<br>53 kg   |
| MIB580  | 30 x 34 x 50<br>763 x 864 x 1270 mm<br>(with 6" legs)   | 580 lb<br>263 kg   | 164 lb<br>75 kg   |
| MIB580N | 30 x 34 x 50<br>763 x 864 x 1270 mm<br>(with 6" legs)   | 580 lb<br>263 kg   | 164 lb<br>75 kg   |



MIB400



MIB580





## PAN RACKS

### FULL SIZE RACK (16 Pan) *Discontinued*

Fits 2 and 3 door reach-in refrigerators and freezers only.


### HALF SIZE RACK (7 Pan)

Fits 1, 2, and 3 door reach-in refrigerators and freezers.  
Fits table models which use side-mounted compressors  
(2 and 3 door back-bar coolers, all pizza tables).

- 1" Square Tube Frame
- Ideal for Storage of Bun Pans or Trays
- Ships Knocked Down, Carton Box Packing
- 18 GA. Aluminum Tubing 1" x 1"
- 18 GA. Aluminum Angle Slides 1" x 1.5" on 3" Centers



MXPR-16  
16 Pan Capacity  
*Discontinued*

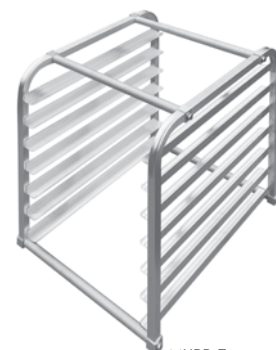

MXPR-7  
7 Pan Capacity

| Model   | Insert Rack Dim<br>(W"xD"xH")                 | Shipping<br>Weight | Pan<br>Capacity<br>(18"x26") |
|---------|---|--------------------|------------------------------|
| MXPR-7  | 20.25 x 26 x 23<br>514.3 x 660.4 x 584 mm     | 7 lb<br>3 kg       | 7                            |
| MXPR-16 | 20.25 x 26 x 51<br>514.3 x 660.4 x 1,295.4 mm | 13 lb<br>6 kg      | 16                           |

## BACKSPLASH (Add On)

Easily installed on Undercounter X-Series.






| Model     | Description                                  |
|-----------|--|
| XBS27-3.5 | 3.5" Add-On Backsplash for 27" Undercounters |
| XBS48-3.5 | 3.5" Add-On Backsplash for 48" Undercounters |
| XBS60-3.5 | 3.5" Add-On Backsplash for 60" Undercounters |
| XBS72-3.5 | 3.5" Add-On Backsplash for 72" Undercounters |

## WATER FILTERS



| Model      | Description                         |
|------------|-------------------------------------|
| TLC-3200S  | Carbon Block Filter w/Polyphosphate |
| TLC-107096 | Single Head w/Gauge & Filter        |
| TLC-107097 | Double Head w/Gauge & Filters       |

# Ice Cube Sizes

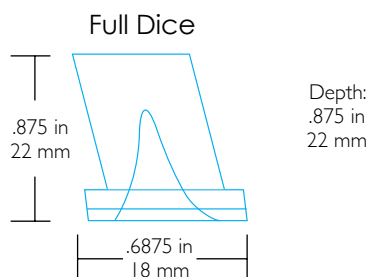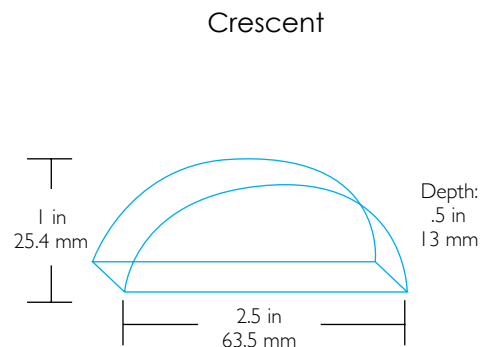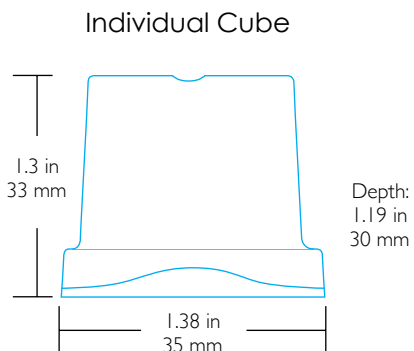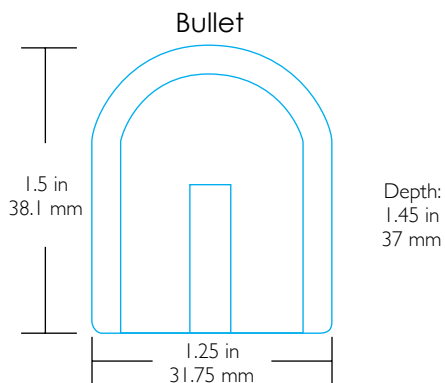

## Guide for Sizing Ice Making Equipment\*

### RESTAURANTS

- 2 LB PER CUSTOMER
- 5 LB PER SEAT

### COCKTAIL LOUNGE

- 3 LB PER CUSTOMER

### SALAD BARS AND ICED DISPLAYS

- 10 – 12 LB PER SQUARE FOOT (4" DEPTH)

### HEALTH CARE

- 6 LB PER BED
  - 2 LB PER EMPLOYEE
- ### HOTEL AND LODGING
- 5 LB PER ROOM

### CONVENIENCE STORES

- 5 OZ. PER 12 OZ. DRINK
- 8 OZ. PER 20 OZ. DRINK
- 12 OZ. PER 32 OZ. DRINK
- ADD 50% IF USING COLD PLATE

\* Sizing guide reflects usage for 24 hours

## Notes

[illegible]



3355 Enterprise Avenue • Suite 160 • Fort Lauderdale, FL 33331  
Tel: 954.202.7419 • Fax: 954.202.7337  
[www.MaxximumFoodService.com](http://www.MaxximumFoodService.com)